MYCOOLMAN

Operation Manual

for Air Conditioner Model CCA2700i



www.mycoolman.com.au

LEISURE-TEC Australia Pty Ltd

MYCOOLMAN AIR CONDITIONER

Thanks for choosing Our RV air conditioning devices. Please read the instructions carefully before installation or first use of the device and store it in a place where all users could find it for easy reference.
If the device is transferred or sold, please hand over the instructions along with it so that the new user is aware of installation methods, usage and safety requirements.

Table of content

1.0 Explanation of symbols	Page	3
2.0 Safety instructions	Page	3
2.1 General safety instructions	Page	3-4
2.2 Operating the device safely	Page	4
3.0 Intended use	Page	5
4.0 Technical description	Page	5
4.1 Components	Page	5
4.2 Control panel	Page	6
4.3 Remote control	Page	6
4.4 Air conditioning modes	Page	7
5.0 Installation instructions	Page	8
5.1 Choosing Installation location	Page	8-10
5.2 Roof preparation	Page	11-13
5.3 Placing rooftop air conditioner on the roof	Page	14-16
5.4 Wiring the system	Page	16-17
5.5 Installing discharge duct and mounting bracket	Page	18-20
6.0 Initial use	Page	21
6.1 Inspection before starting up	Page	21
6.2 Checking remote control and insert batteries	Page	21
7.0 Operating the rooftop air conditioner	Page	22
7.1 Basic notes on operation	Page	22
7.2 Operating instructions of remote control	Page	23
7.3 Operating instructions of Bluetooth APP	Page	24
8.0 Cleaning and maintenance	Page	24
9.0 Troubleshooting	Page	25-28
10.0 Wiring diagram	Page	29
11.0 Parts list	Page	30-31
12.0 Technical data	Page	32
13.0 Warranty Terms & Conditions	Page	32

1.0 Explanation of symbols

DANGER!
Indicates a potential hazardous situation which, if not avoided, could result in death or serious injury.

WARNING!
Indicates a potential hazardous situation which, if not avoided, could result in minor or moderate injury.

ATTENTION!
Indicates a potential hazardous situation which, if not avoided, could result in property damage.

NOTE!
Supplementary information for product operation.

2.0 Safety instructions

Please observe the prescribed safety instructions and stipulations from the vehicle manufacturer and service workshops. Manufacturer accepts no liability for damage in the following cases:

- Faulty assembly or connection
- Damage to the product resulting from mechanical influences and excess voltage
- Alterations to the product without express permission from the manufacturer
- Use for purposes other than those described in the operating manual

2.1 General safety instructions

WARNING!

- Installation and repair of the rooftop air conditioner may only be carried out by qualified personnel who are familiar with the risks involved and the relevant regulations.
  Inadequate repairs may cause serious hazards. ·
- Electrical devices are not toys.
- Keep electrical devices out of reach of children. Do not allow them to use electrical devices without supervision.
- Persons whose physical, sensory or mental capabilities or whose lack of experience and knowledge prevent them from using electrical devices safely should not use it without supervision or instruction by a responsible person.
- Do not undo the upper cover of the rooftop air conditioner in the event of a fire.
  Use approved extinguishing agents instead. Do not use water to extinguish fires.

ATTENTION!

- The rooftop air conditioner must be installed securely so that it cannot fall down.
- Do not use the rooftop air conditioner near flammable fluids or in closed rooms.
- Make sure no combustible objects are stored or installed near the air outlet. A distance of at least 50 cm must be kept.
- Do not reach into air outlets or insert any foreign objects in the rooftop air conditioner.

ATTENTION!

- Only use the device as intended.
- The rooftop air conditioner is not suitable for use in agricultural or construction vehicles.
- Do not make any alterations or conversions to the electrical device.
- If faults occur in the refrigerant circuit, the system must be checked by a specialist company and repaired properly. The refrigerant must never be released into the air.

NOTE!

- Please ask your vehicle manufacturer if a technical inspection is required after fitting an rooftop air conditioner and whether the height entered in the vehicle documents needs to be altered to prevent damage when towing/storing.

2.2 Operating the device safely

WARNING!

- The electrical power supply **may only** be connected by a **qualified electrician.**
- Always disconnect the power supply when working on the electrical device.

ATTENTION!

- Use cable ducts to lay cables through walls with sharp edges.
- Do not lay loose or bent cables next to electrically conductive materials (metal).
- Operate the electrical device only if you are certain that the housing and the cables are undamaged.

3.0 Intended use

The rooftop air conditioner is designed for use in motorcaravans, caravans and other vehicles with habitation compartments only.

The rooftop air conditioner is not suitable for installation in construction machines, agricultural machines or similar equipment. It will not work properly if exposed to strong vibrations.

Please do not use the rooftop air conditioner if the ambient temperature is over 52 °C. The performance will be affected at extreme temperature.

ⓘ NOTE!

- You can find additional information on rooftop air conditioners in the operating manual, such as the technical description or the controls.

4.0 Technical description

The rooftop air conditioner supplies the interior with cool or warm dehumidified air without dust and dirt.

The rooftop air conditioner is operated with the touch buttons on the digital control panel and/or the remote control.

ⓘ NOTE!

- The rooftop air conditioner can lower the temperature within the vehicle to a certain level. The temperature depends on the type of vehicle, the ambient temperature and the cooling capacity of your rooftop air conditioner.
- Below an ambient temperature of 16 °C, the rooftop air conditioner does not cool anymore. In this case only use the „Ventilation“ mode for air movement.

4.1 Components

The refrigerant circuit of the rooftop air conditioner consists of the following main components (see Parts list in page 30).

- **Compressor**
  The compressor draws in the refrigerant used and compresses it. This raises the pressure and therefore the temperature of the refrigerant.


- **Condenser**
  The built-in liquefier works like a cooler or heat exchanger. The air flowing past absorbs the heat and the hot refrigerant gas cools down and becomes liquid.

- **Evaporator**
  The evaporators cool down and dehumidify the air flowing past them. The refrigerant absorbs the heat and vaporizes.

- **Blower**
  The blower distributes the cooled air within the vehicle through an air outlet unit.


4.2 Control panel

**The control panel is at the air outlet unit of the rooftop air conditioner.
It contains the following control and display elements:**

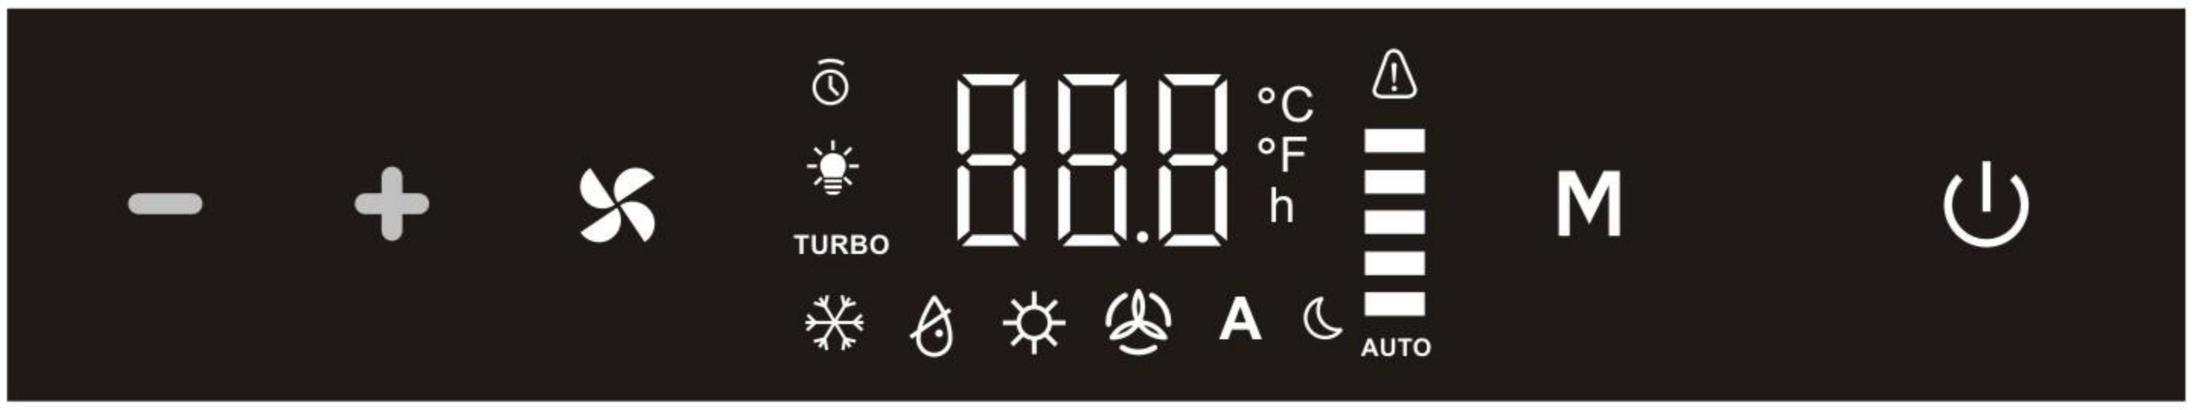

4.3 Remote control

All settings of the device are transmitted to the rooftop air conditioner by remote control. The following control and display elements are available on the remote control:

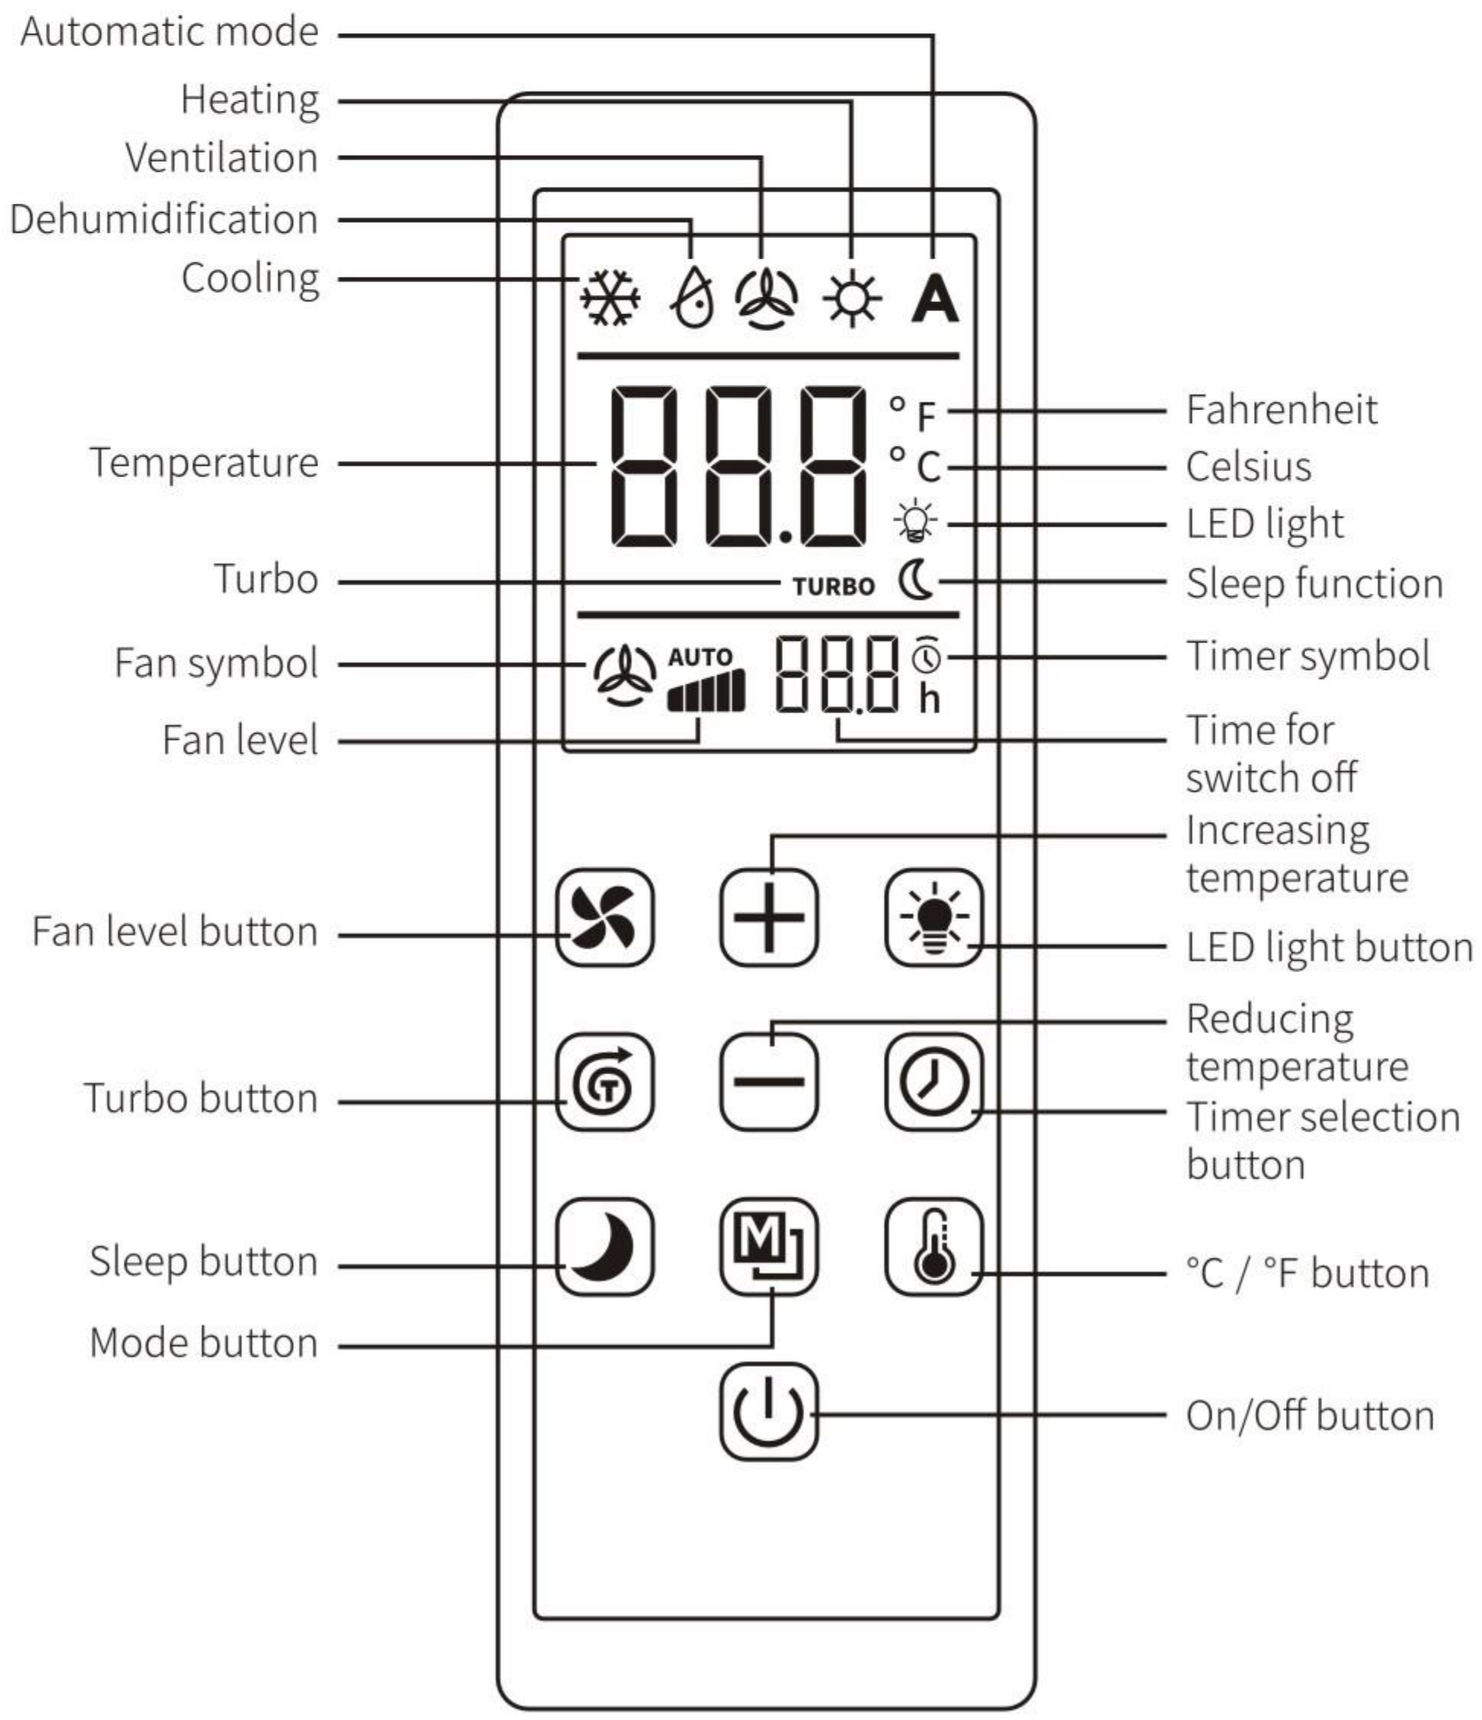

Explanation Control Panel:

Button

Switch the rooftop air conditioner on, and long press for 3 seconds to power off.

Button

Adjusting the fan speed.

Button M

Selecting the operation mode.

Button

Increasing/Decreasing the set temperature value.

4.4 Air conditioning modes

The rooftop air conditioner has the following air conditioning modes:

Mode	Display message	Explanation
Automatic		The rooftop air conditioner will automatically maintain the set temperature by heating or cooling as needed.
Cooling		Setting the temperature and fan level, the rooftop air conditioner will reduce the indoor temperature to the value.
Dehumidification		The temperature and fan speed will be locked to 23 °C /73 °F and fan level 3, not adjustable.
Heating		Setting the temperature and fan level, the rooftop air conditioner will increase the indoor temperature to the value.
Ventilation		Setting the fan level, the rooftop air conditioner will blow air into the indoor.

! NOTE!

- Please use the connecting wirings that are in accordance with state regulations. Including safety switches/isolators required to comply with local guidelines.
- When selecting the generator capacity, it is important to consider the total power consumption of the vehicle, and the power loss of the generator due to high altitude and lack of maintenance.
- Circuit protection: Make sure to use the leakage protector.

5.0 Installation instructions

⚠ ATTENTION!

- Read installation and operating instructions carefully before attempting to start your rooftop air conditioner installation.
- The manufacturer will not be liable for any damages or injury incurred due to non-compliance of the instructions.
- Installation must comply with the national and local codes and/or regulations.
- DO NOT add any devices or accessories to the rooftop air conditioner except those specifically authorized in writing by Manufacturer.
- This equipment must be serviced by qualified personnel and some states/territories require these people to be licensed.


5.1 Choosing Installation location

This rooftop air conditioner is specifically designed for installation on the roof of a vehicle with habitation compartments.
The following points need to be considered to determine the cooling requirements:

- The size of the vehicle.
- The size of the window (increases heat gain).
- Amount of insulation in walls and roof.
- Geographical location where the vehicle will be used.
- **Normal locations:** the rooftop air conditioner is designed to fit over an existing roof vent opening. When the vent is removed, it normally creates a 360 x 360mm (+/-2mm) opening or a 400 x 400mm (+/-2mm) opening.
- **Other locations:** When no roof vent is available or another location is desired, the following is recommended:


a. **For one unit installation:** The rooftop air conditioner should be mounted slightly forward of center (front to back) and centered from side to side. See FIG.01.

01

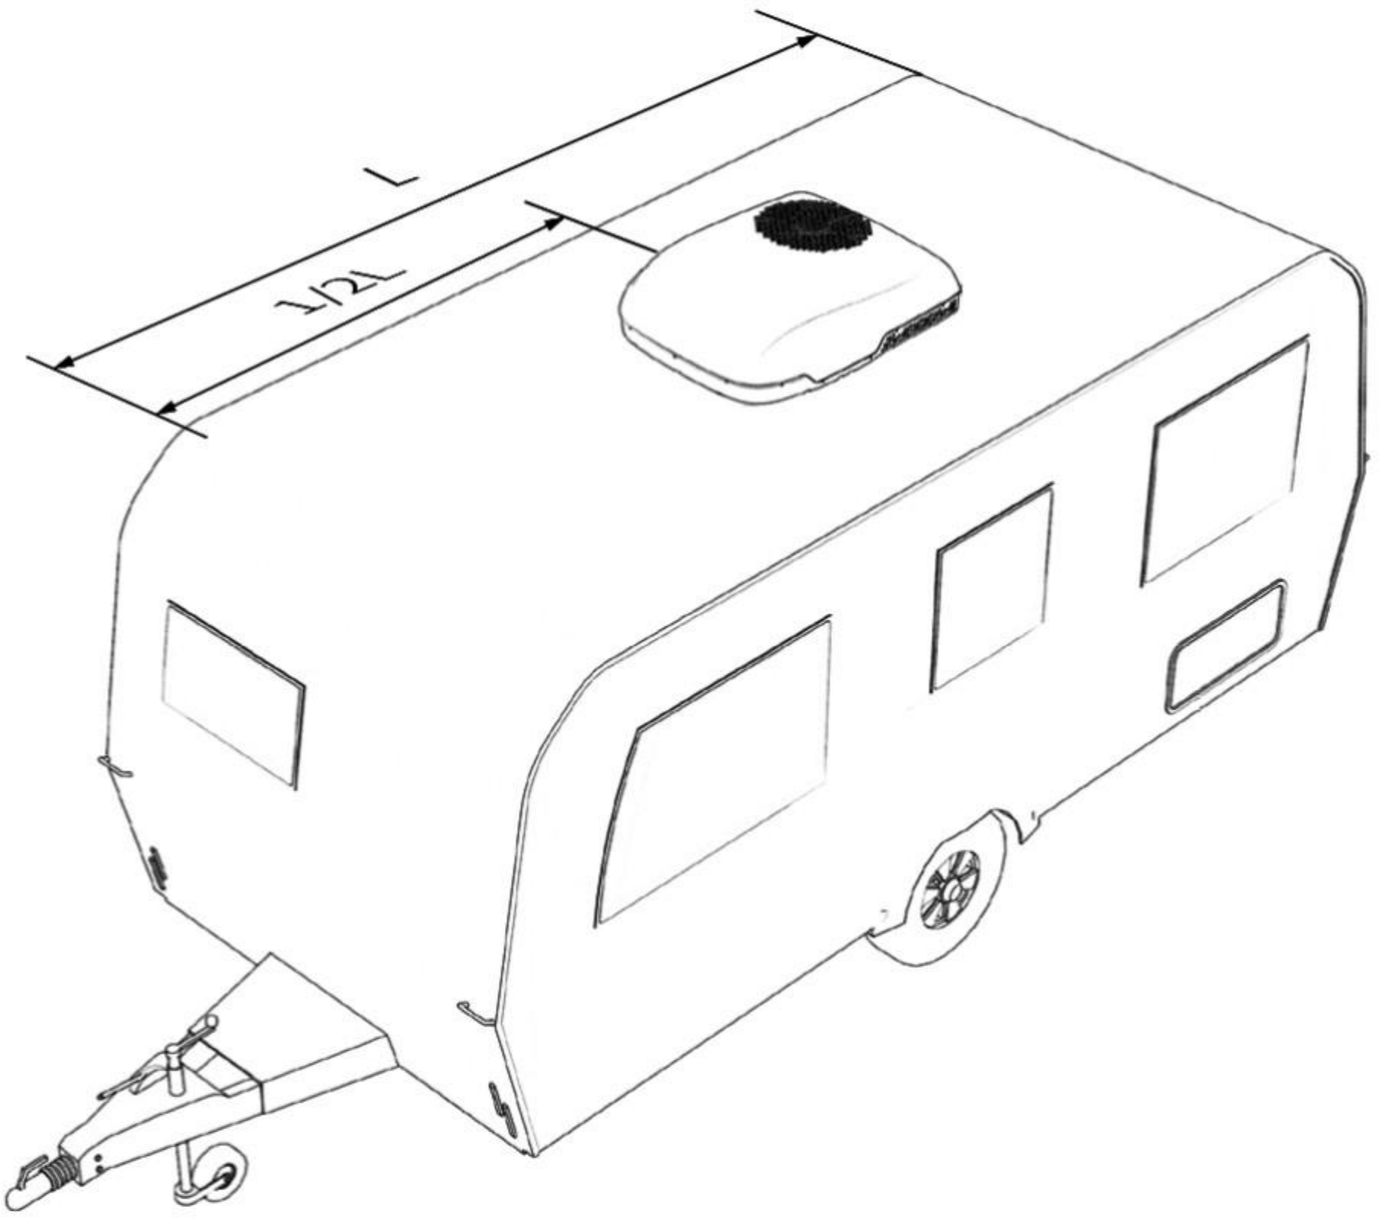

b. **For two units installation:** Install one rooftop air conditioner 1/3 and the other 2/3 from front of vehicle and centered from side to side. See FIG.02.

02

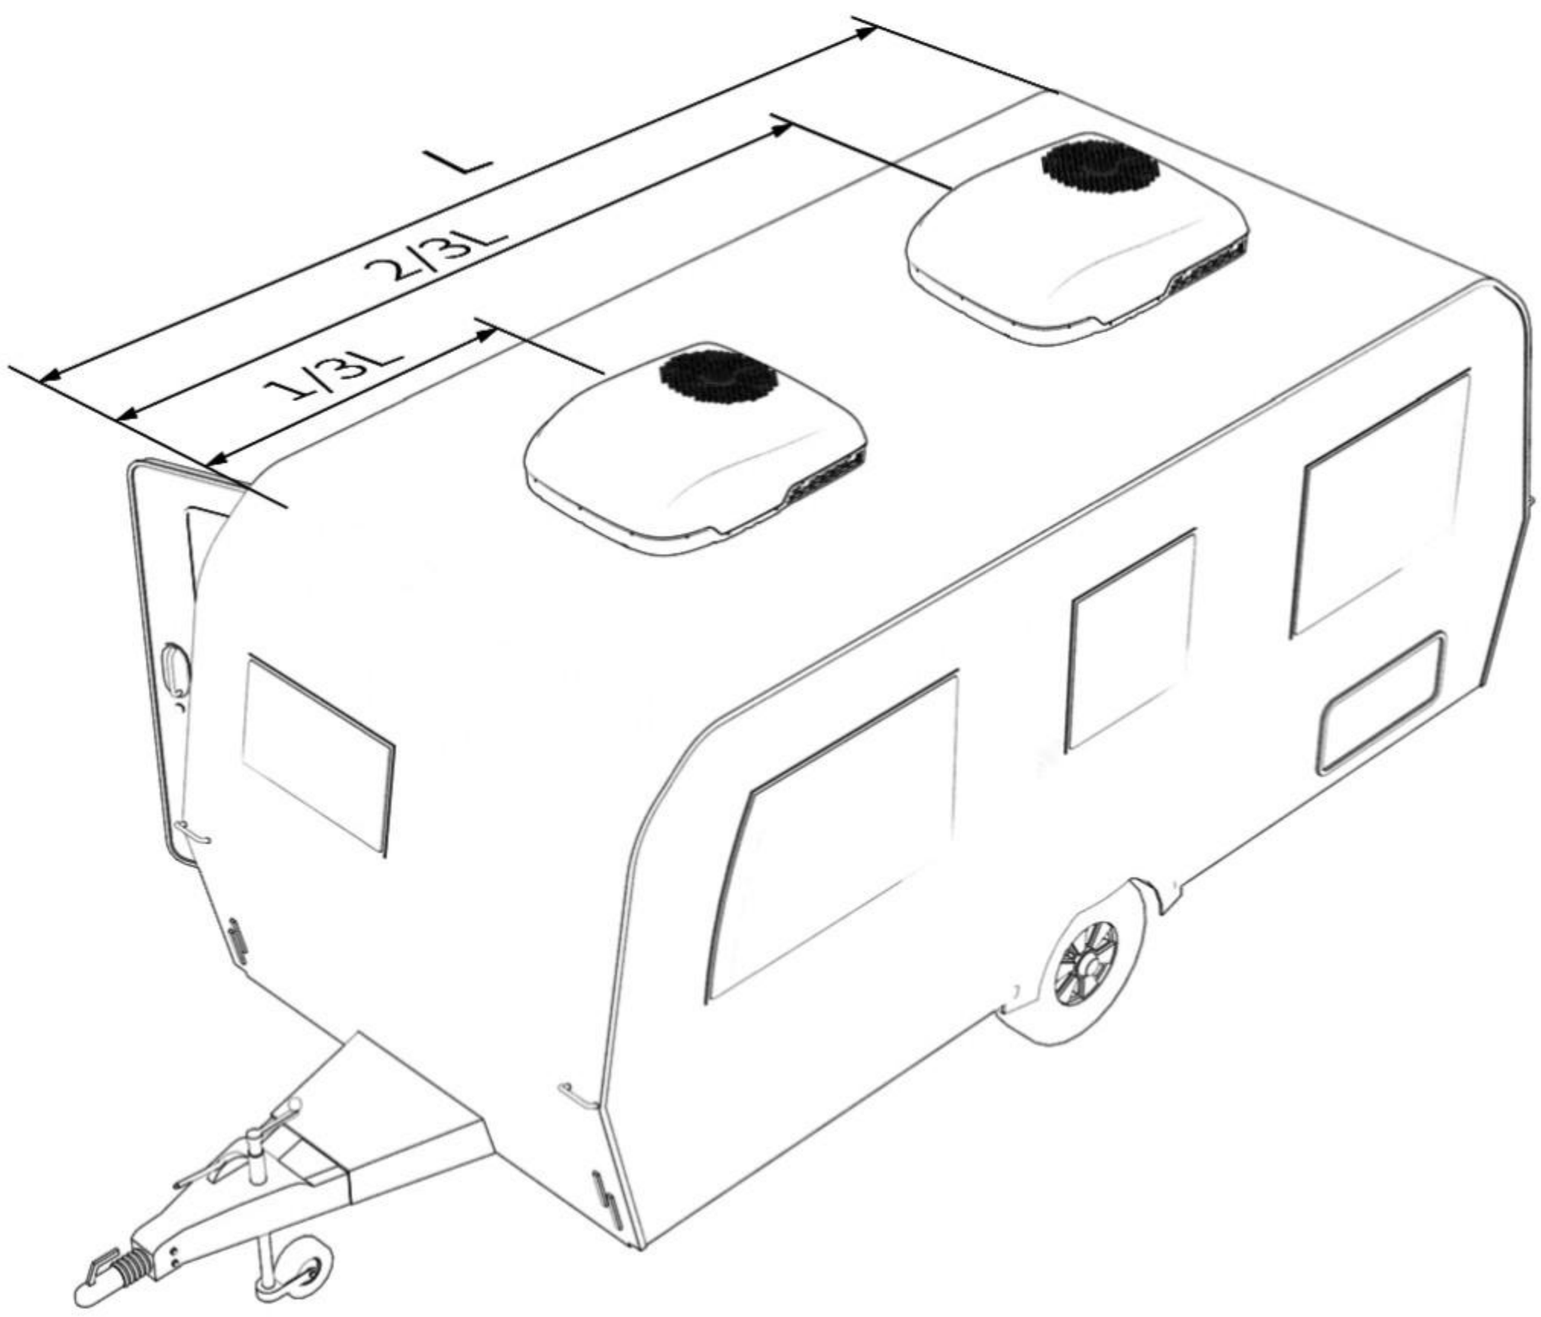

After location has been selected:

a. Check for obstructions in the area where rooftop air conditioner will be installed.

b. The roof must be designed to support 60KG when the vehicle is in motion. Normally a 100KG static load design will meet this requirement.


c. Check inside the vehicle for air distribution box obstructions(i.e. door openings, room dividers, curtains, ceiling fixtures, etc.). Please check the dimensions of the rooftop air conditioner and the air distribution box. See FIG.03.

⚠ ATTENTION!

- It is preferred that the unit be installed on a relatively flat and level roof section measured with the vehicle parked on a level surface, but up to a 5° tilt is acceptable.

- It is the responsibility of the designer to ensure the structural integrity of the vehicle.
  Never create a low spot on the roof where water will collect.
  Water standing around the rooftop air conditioner may leak into the interior causing damage to the product and vehicle.

03

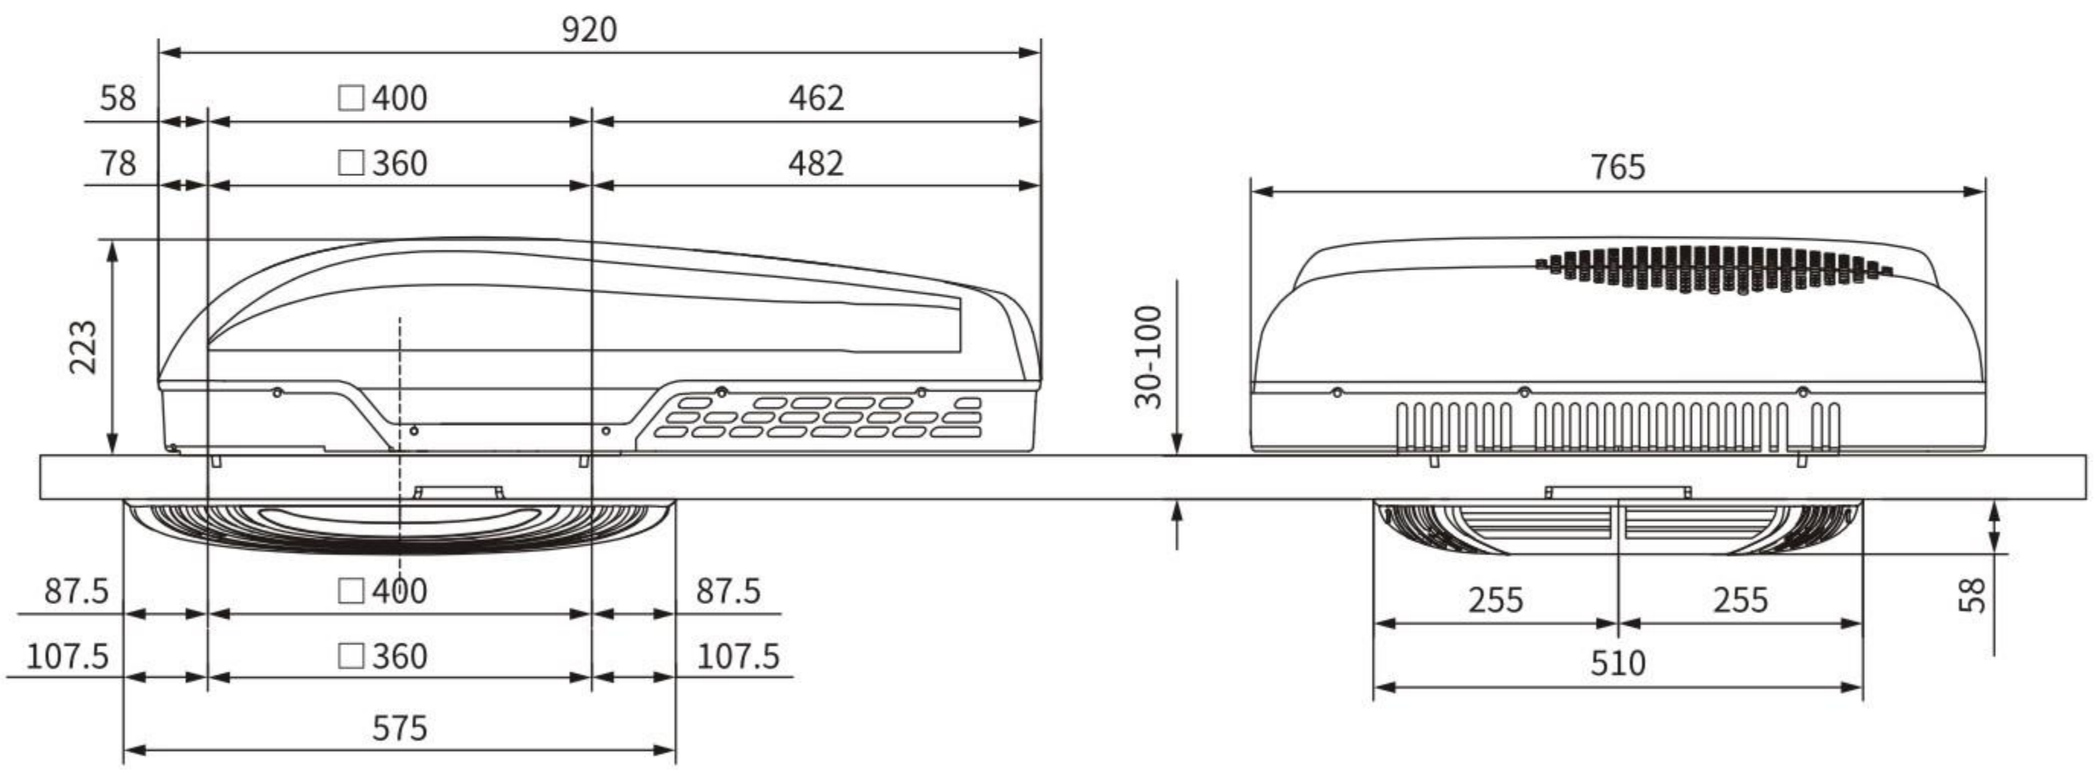

5.2 Roof preparation


- **Roof vent removal:**
  a. Unscrew and remove the roof vent.
  b. Remove all caulking compound around opening.
  c. Seal all screw holes and seams where the roof gasket will be located.
  Use a good quality grade of all weather sealant.
- **New opening:** (installation other than vent opening)
  A 360*360mm (+/-2mm) or 400*400mm (+/-2mm) opening must be cut through the roof and ceiling of the vehicle if the existing vents will not be used.
  It is recommended this opening be located between roof reinforcing members.

  Mark a 360*360mm (+/-2mm) or 400*400mm (+/-2mm) square on the roof and carefully cut the opening. Using the roof opening as a guide, cut the matching hole in the ceiling. See FIG.04.

⚠ DANGER!


- **There may be electrical wiring between the roof and the ceiling.**
  Disconnect 220-240V AC power cord and the positive (+) 12V DC terminal at the supply battery. Failure to follow this instruction may create a shock hazard causing death or severe personal injury.
- **Cutout/Opening Requirements:**
  a. If the opening exceeds 365*365mm, it will be necessary to install spacers.
  b. If the opening is less than 358*358mm, it must be enlarged.
- **Wiring requirements:**
  Route a copper 2.5mm^2 with ground & supply line from the fuse or circuit breaker box to the roof opening.
  a. The power supply must be on a separate 20 Amp Time Delay Fuse or Circuit Breaker.
  b. Make sure at least 380mm of wire extends into the roof opening.
  This insures easy rooftop air conditioner attachment.
  c. Wiring methods must comply with all national and local wiring codes and/or regulations.
  d. If vent fan was removed, the existing wire may be used provided it is of proper size and correctly fused.
  e. The entry wires to the opening need more protection to avoid damage.

04

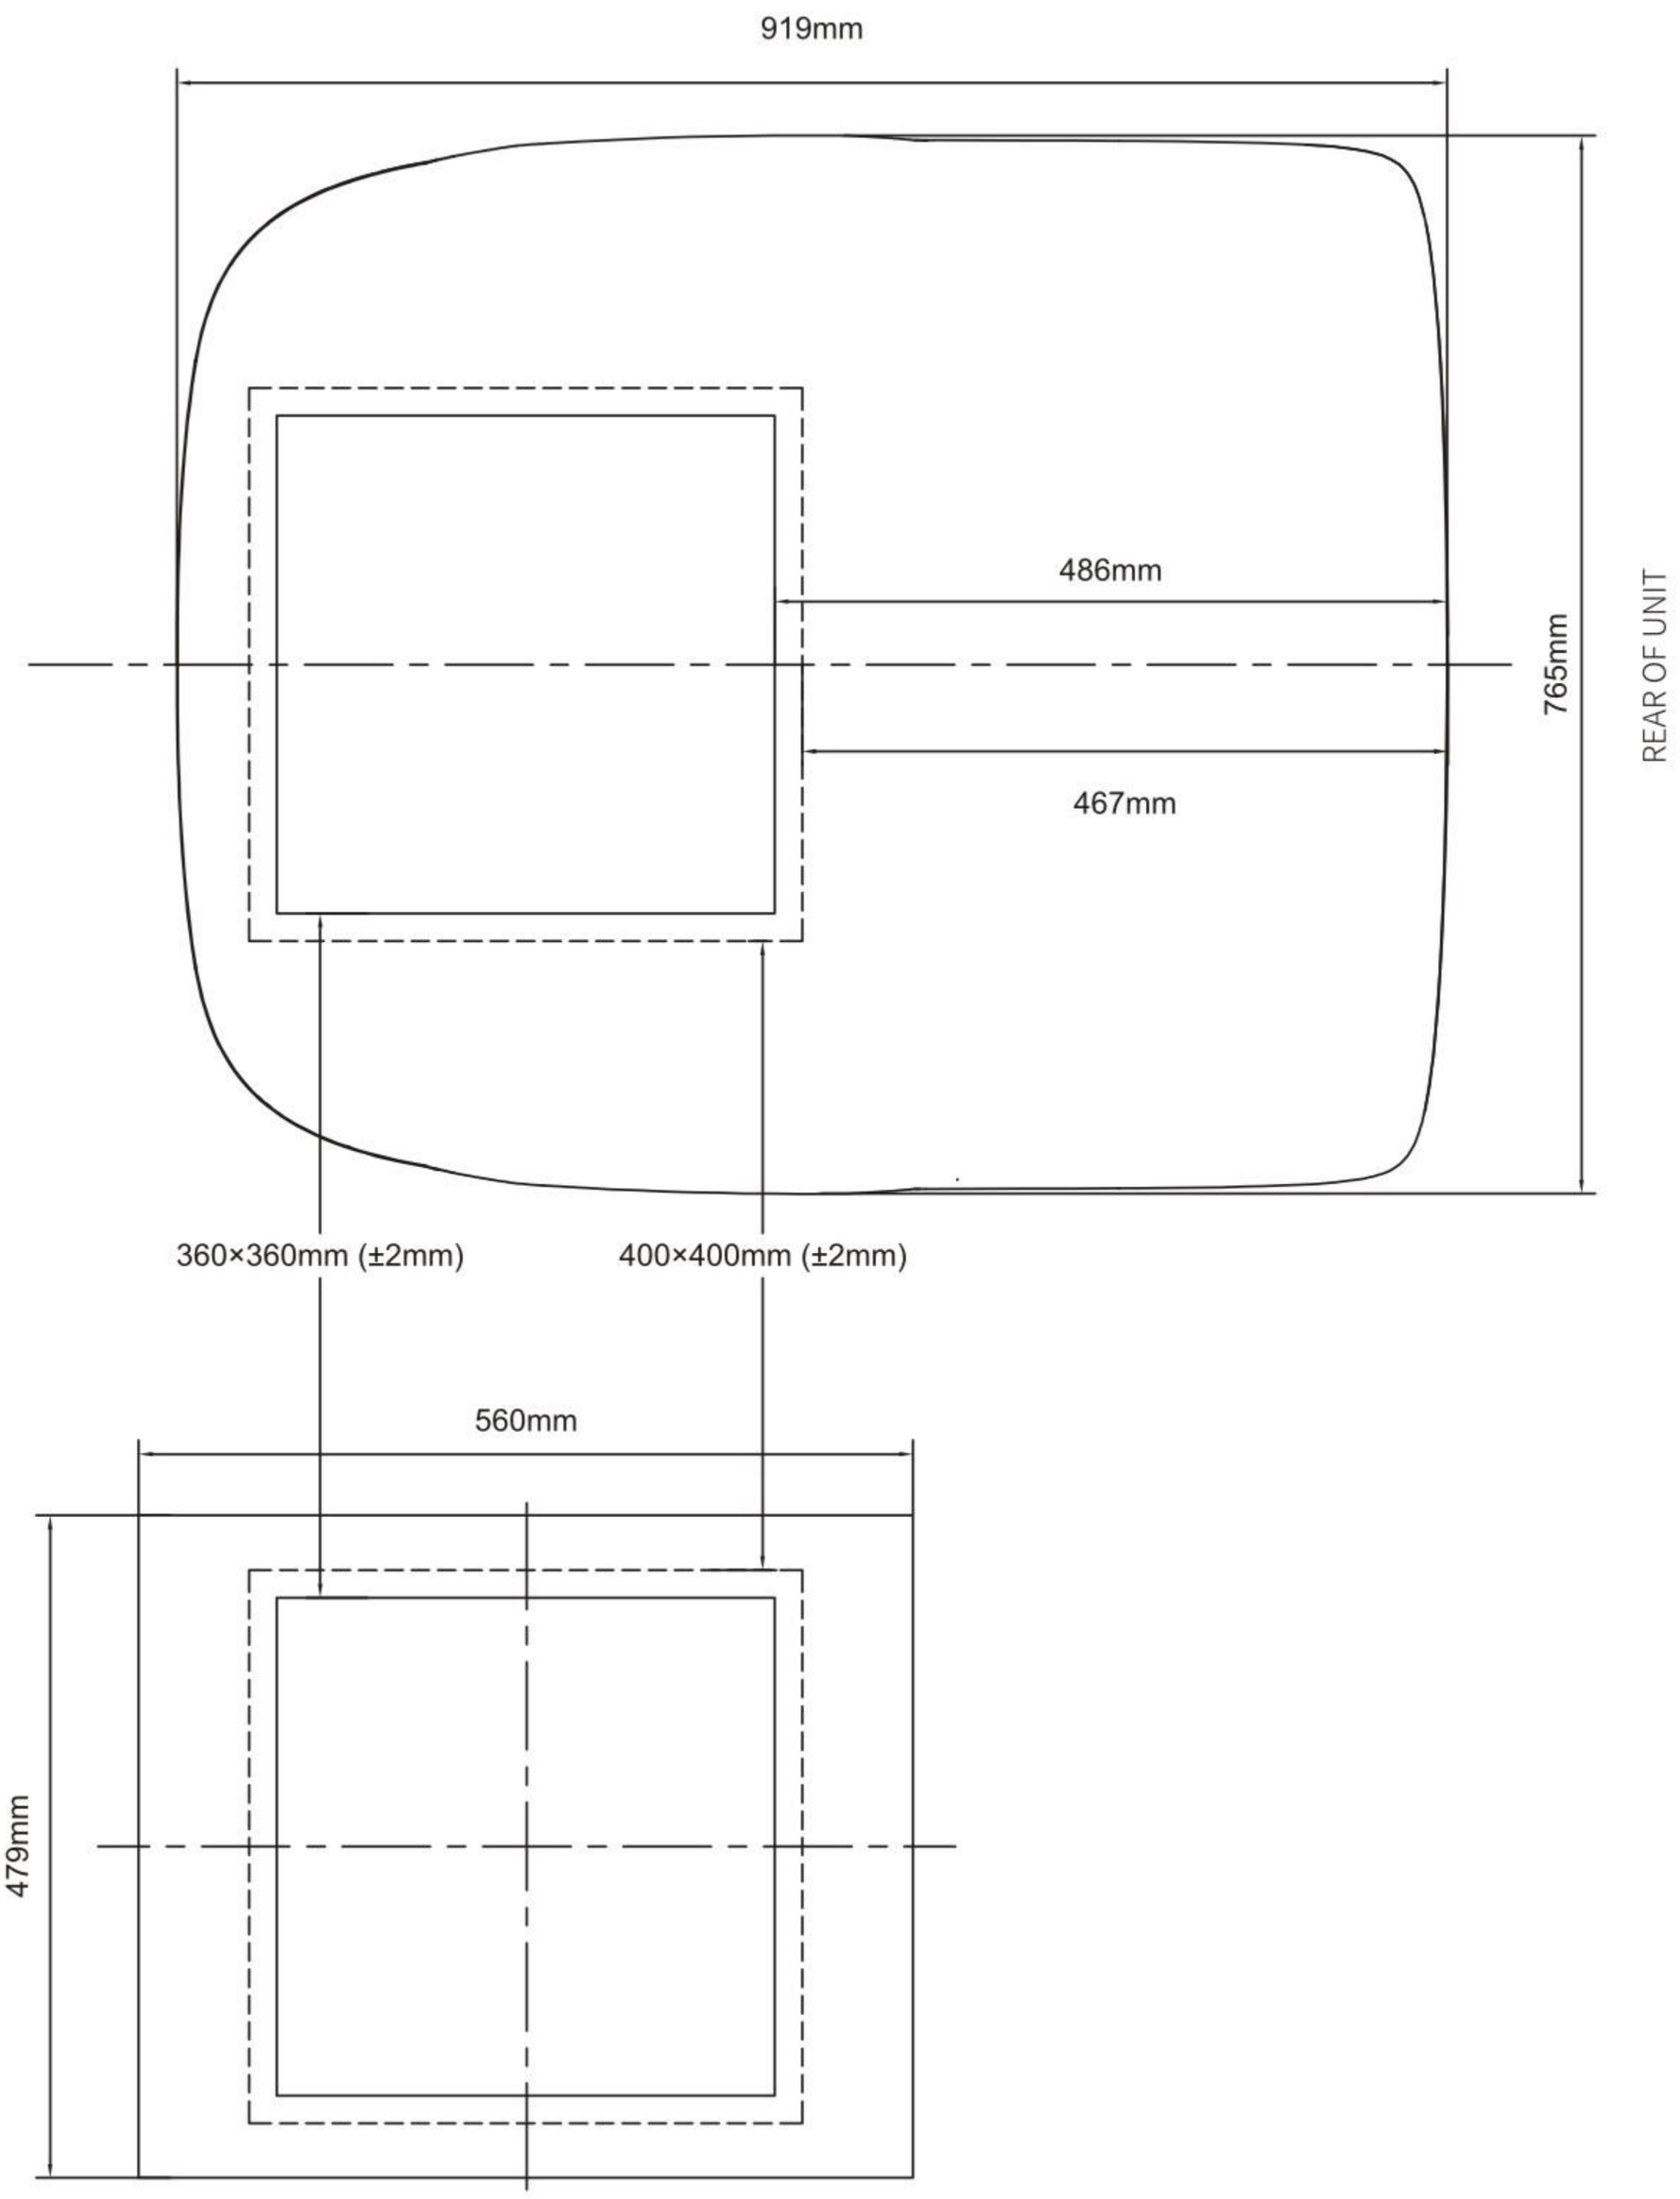

- The opening must be framed to provide adequate support and prevent air from being drawn from the roof cavity. Framing stock 20mm or more in thickness must be used. Remember to provide an entrance hole for the power supply wire. See FIG.05.

05

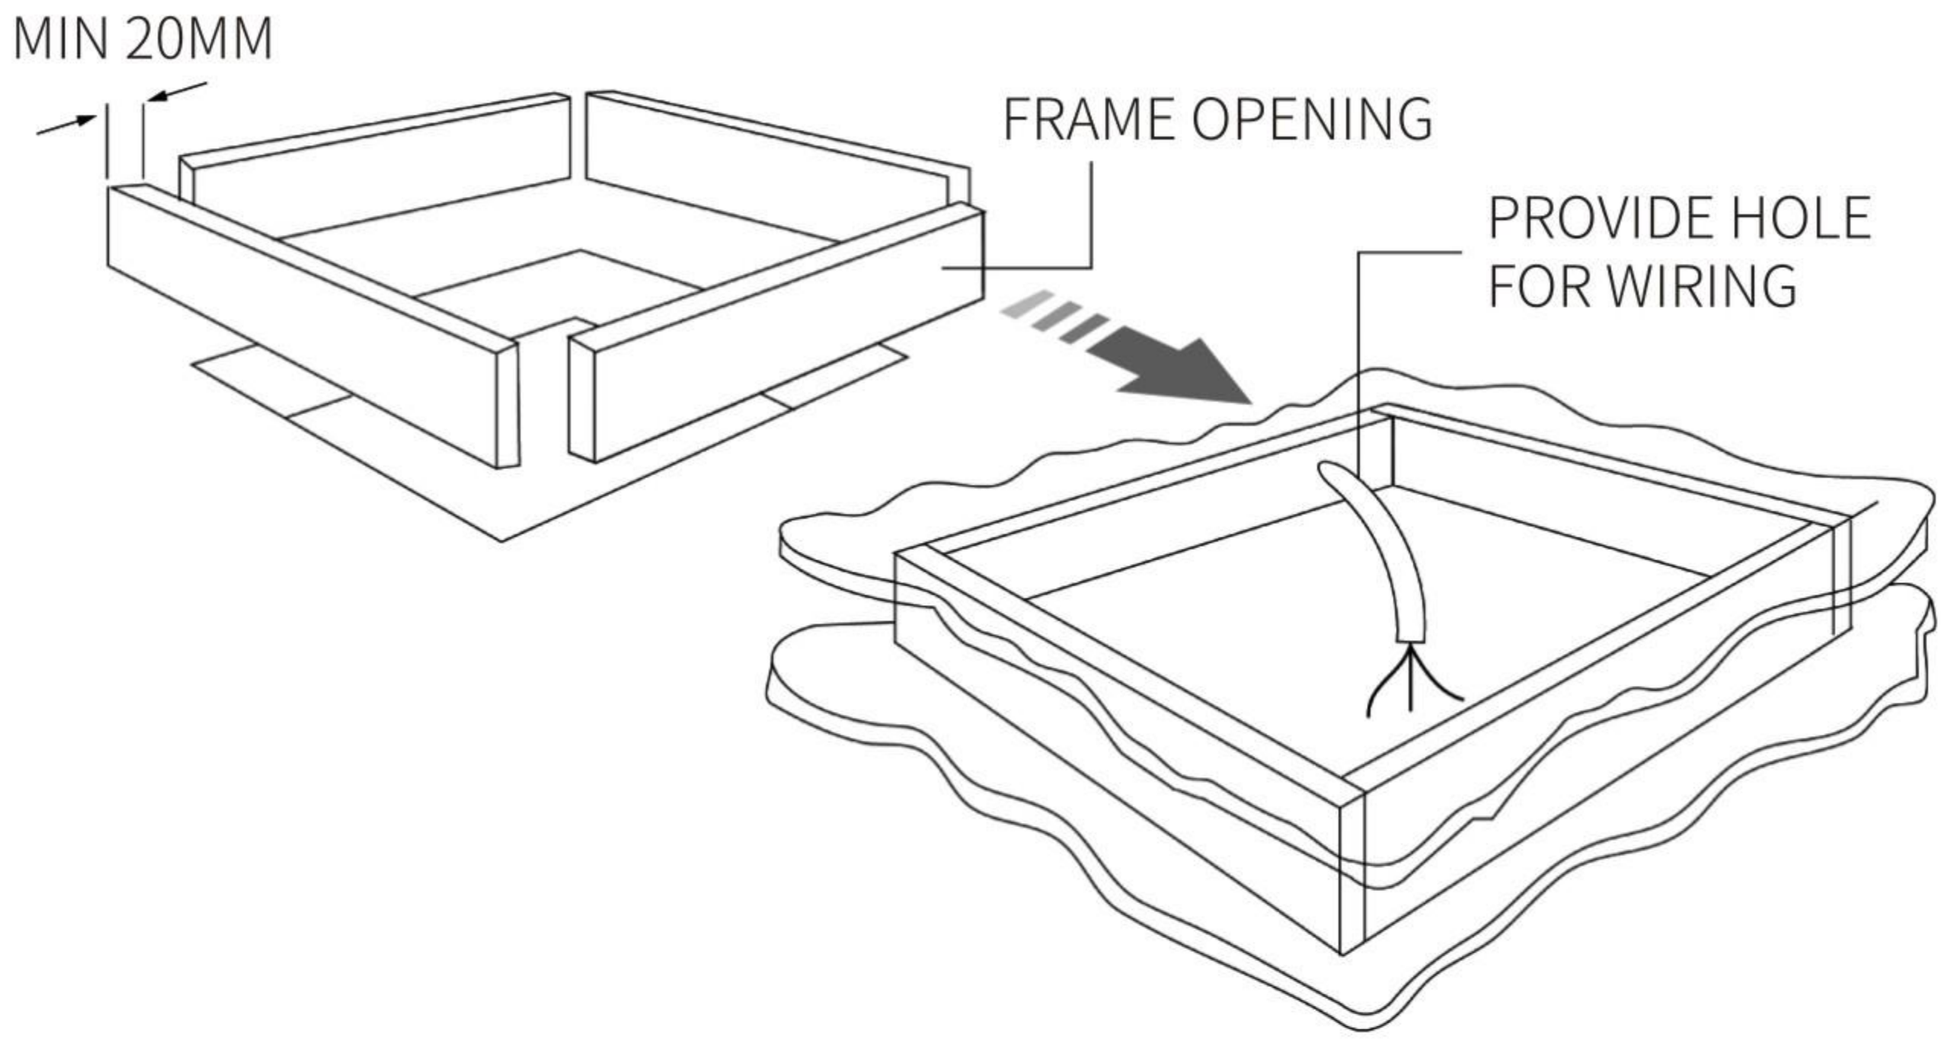


- The 360 x 360mm (+/-2mm) or 400 x 400mm (+/-2mm) roof opening is part of the return air duct and must be polished according to the industry standard.

5.3 Placing rooftop air conditioner on the roof

⚠ ATTENTION!

- This rooftop air conditioner weighs approximately 39 Kg.
  To prevent back injury, use a mechanical hoist to place air conditioner on roof.
- Take out the roof mounting frame from the carton, and place it on the prepared opening in the roof, pay attention to the direction of the frame.
  There are two types of mounting frame offered in the package, one is for opening size of 360 x 360mm and the other one is for 400 x 400mm. See FIG.06.

06

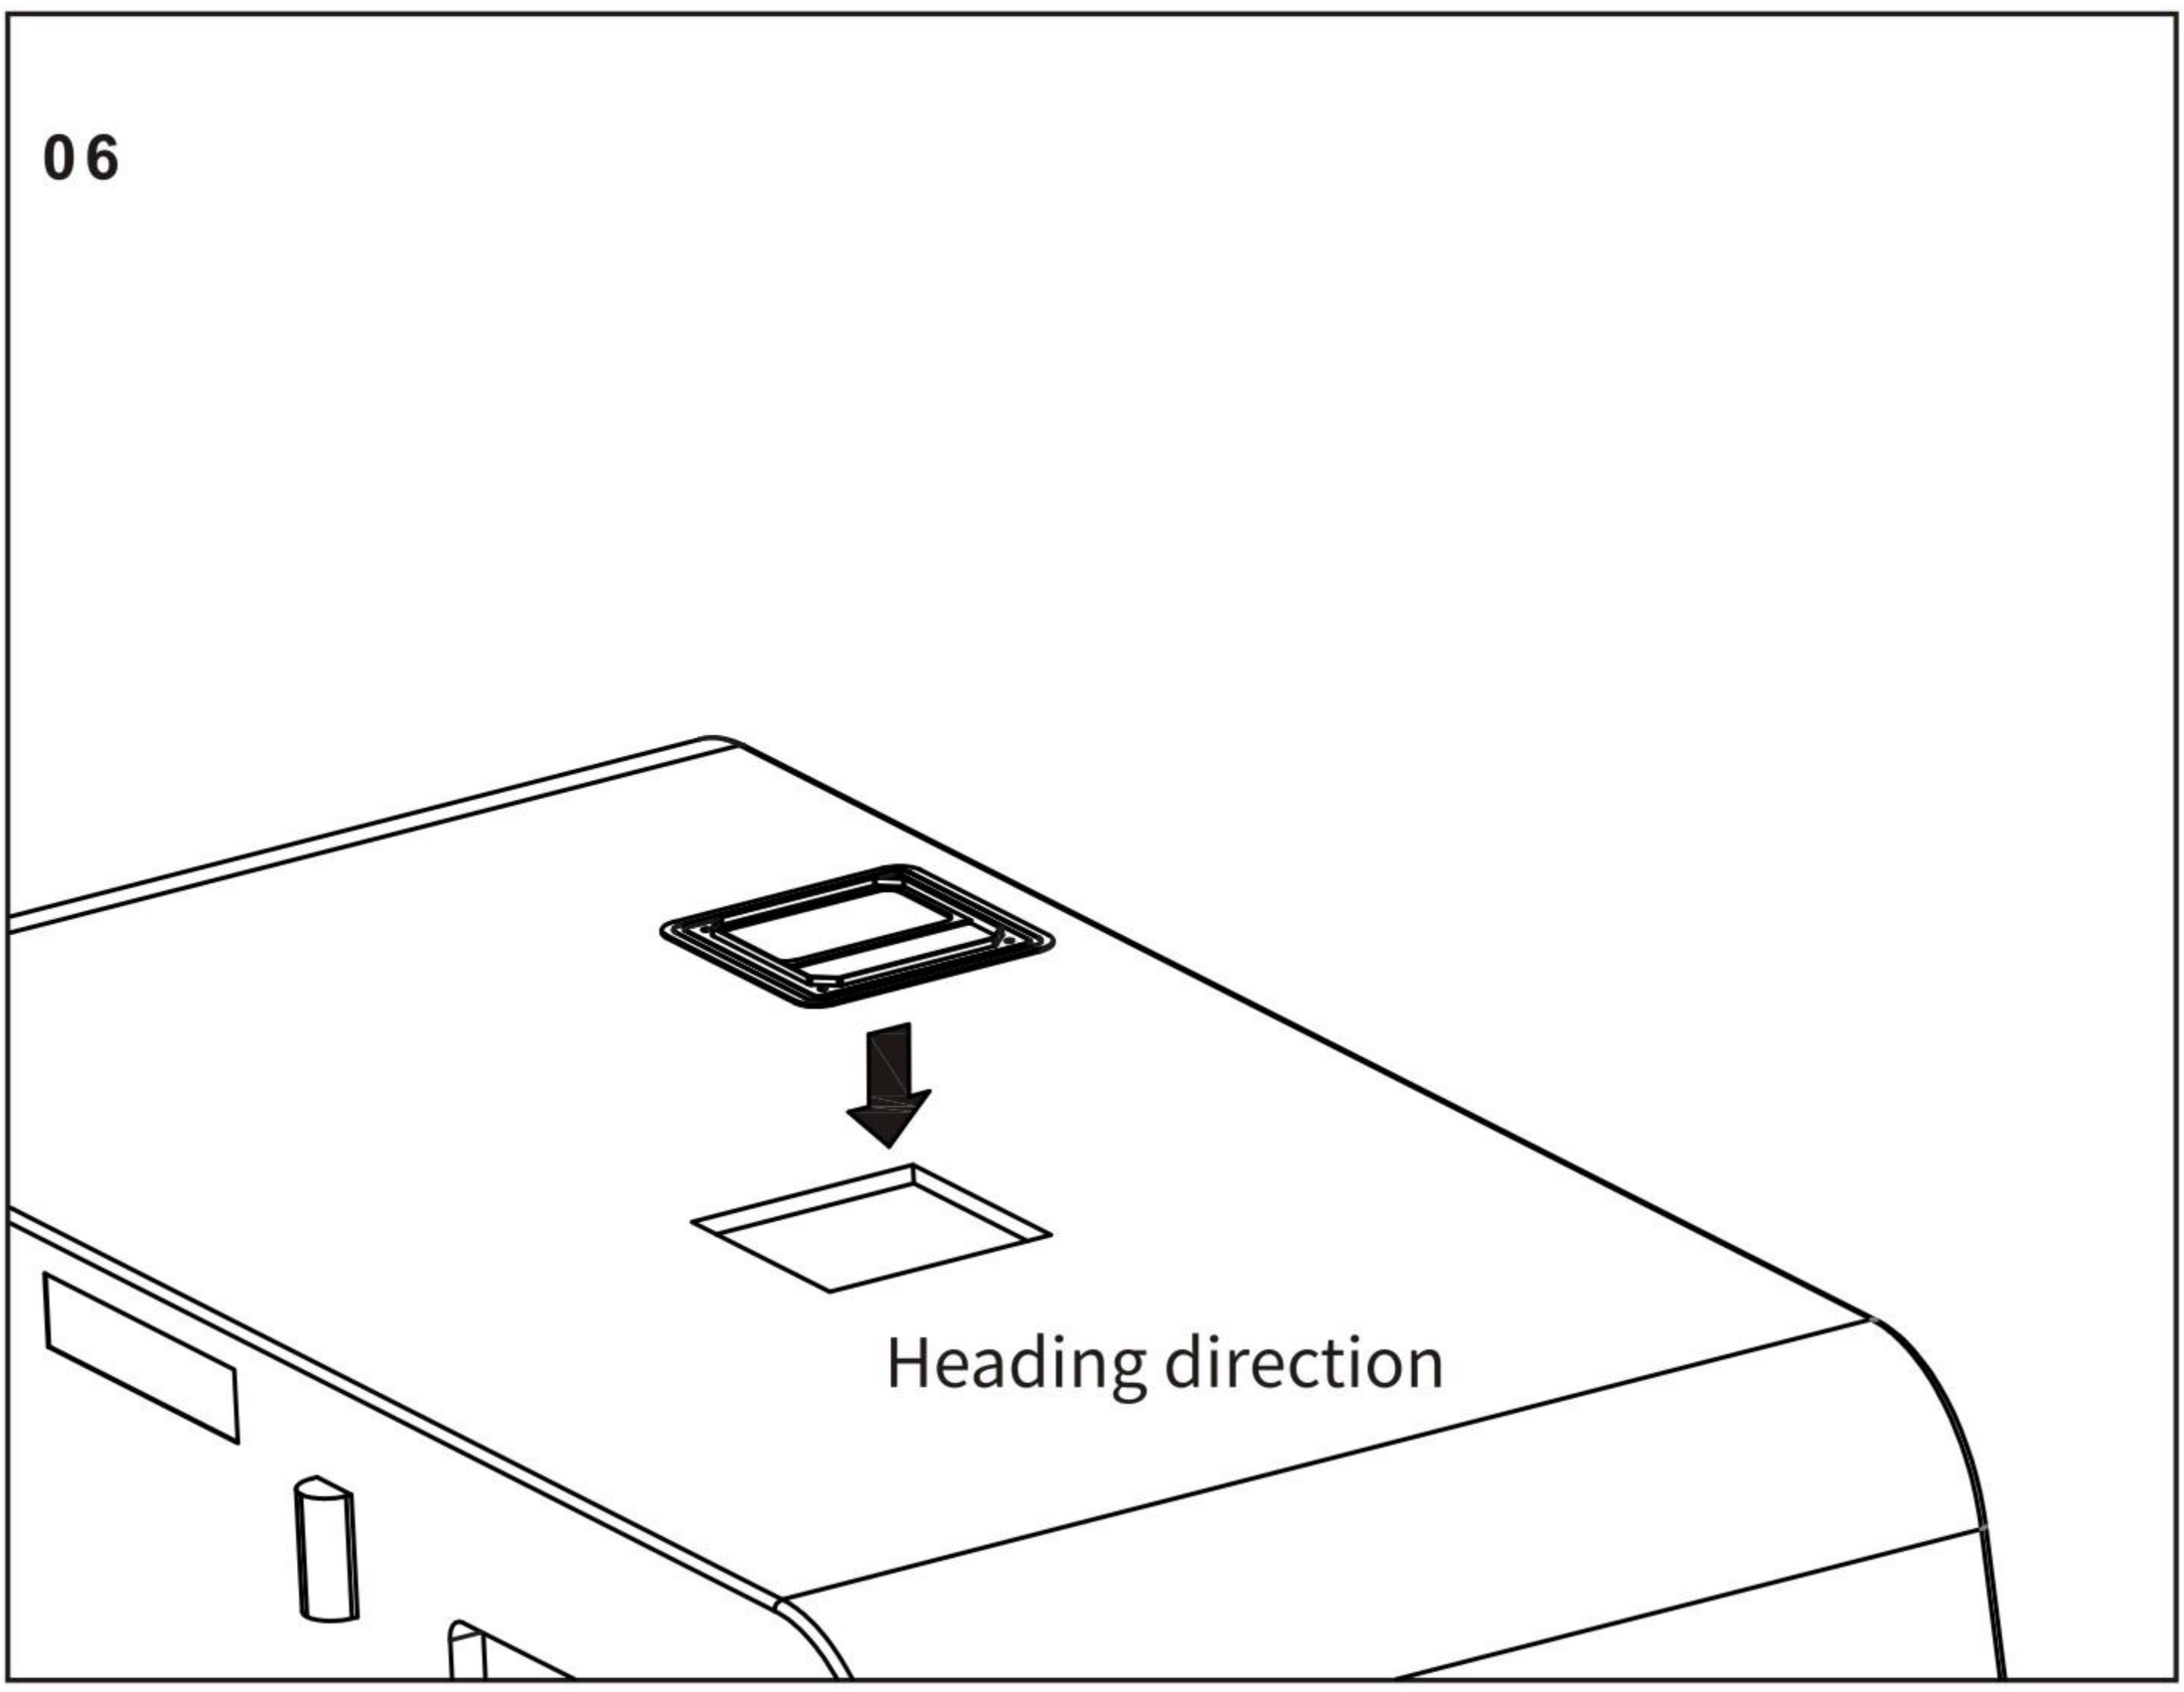


⚠ ATTENTION!

- Do not slide the unit. This may damage the gasket attached to the bottom and create a leaky installation.


- Seal around the roof mounting frame with flexible non-hardening butyl sealing compound. See FIG.07.

07

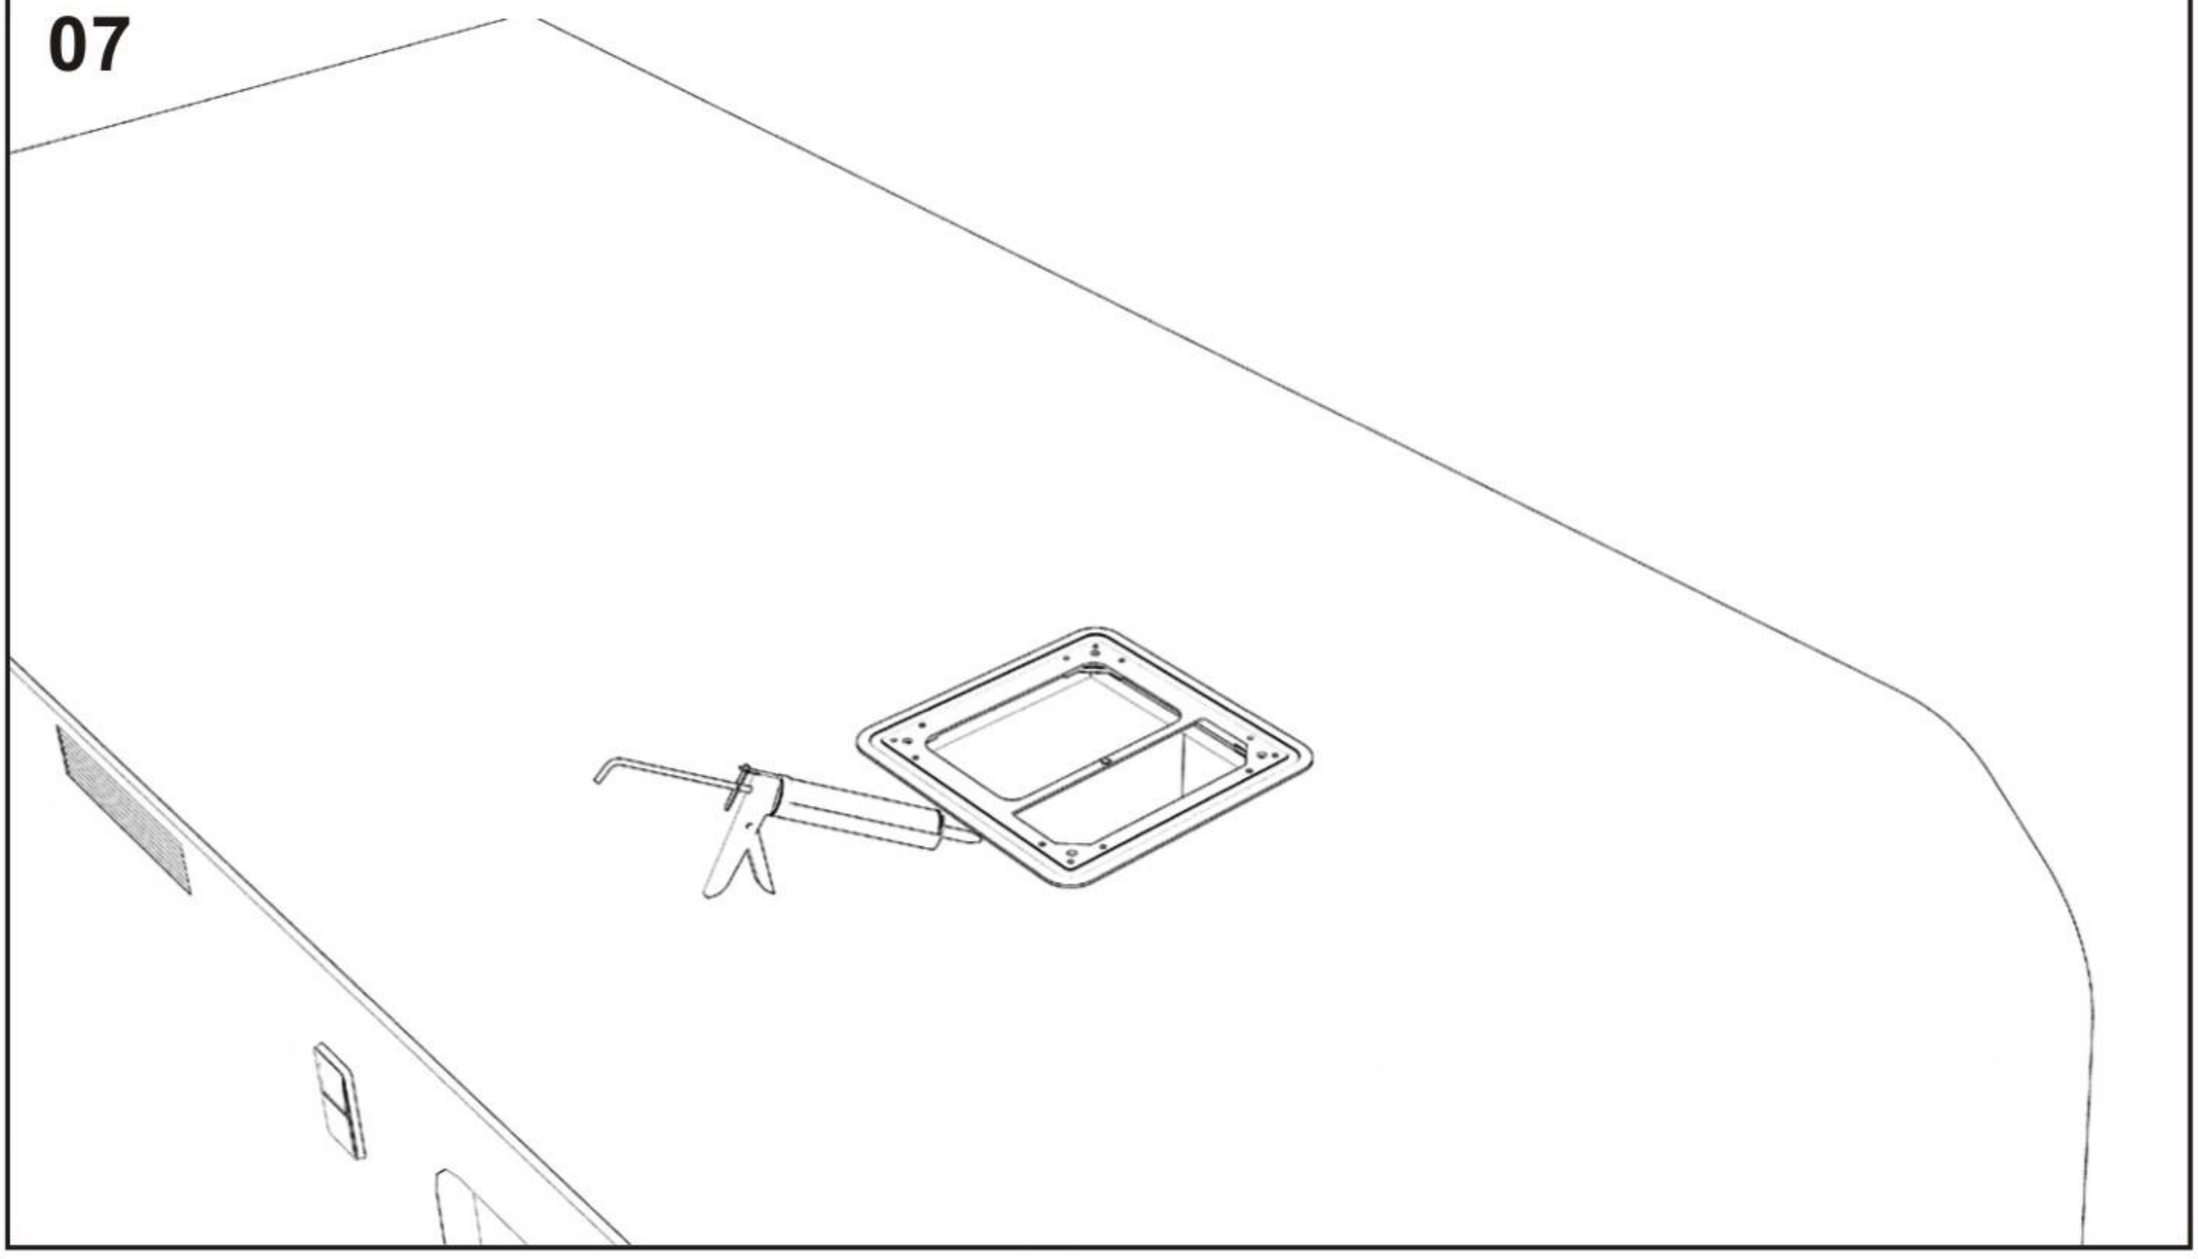


- Take out the rooftop air conditioner from the carton, and place it on the roof aligning with the roof mounting frame. See FIG.8.

08

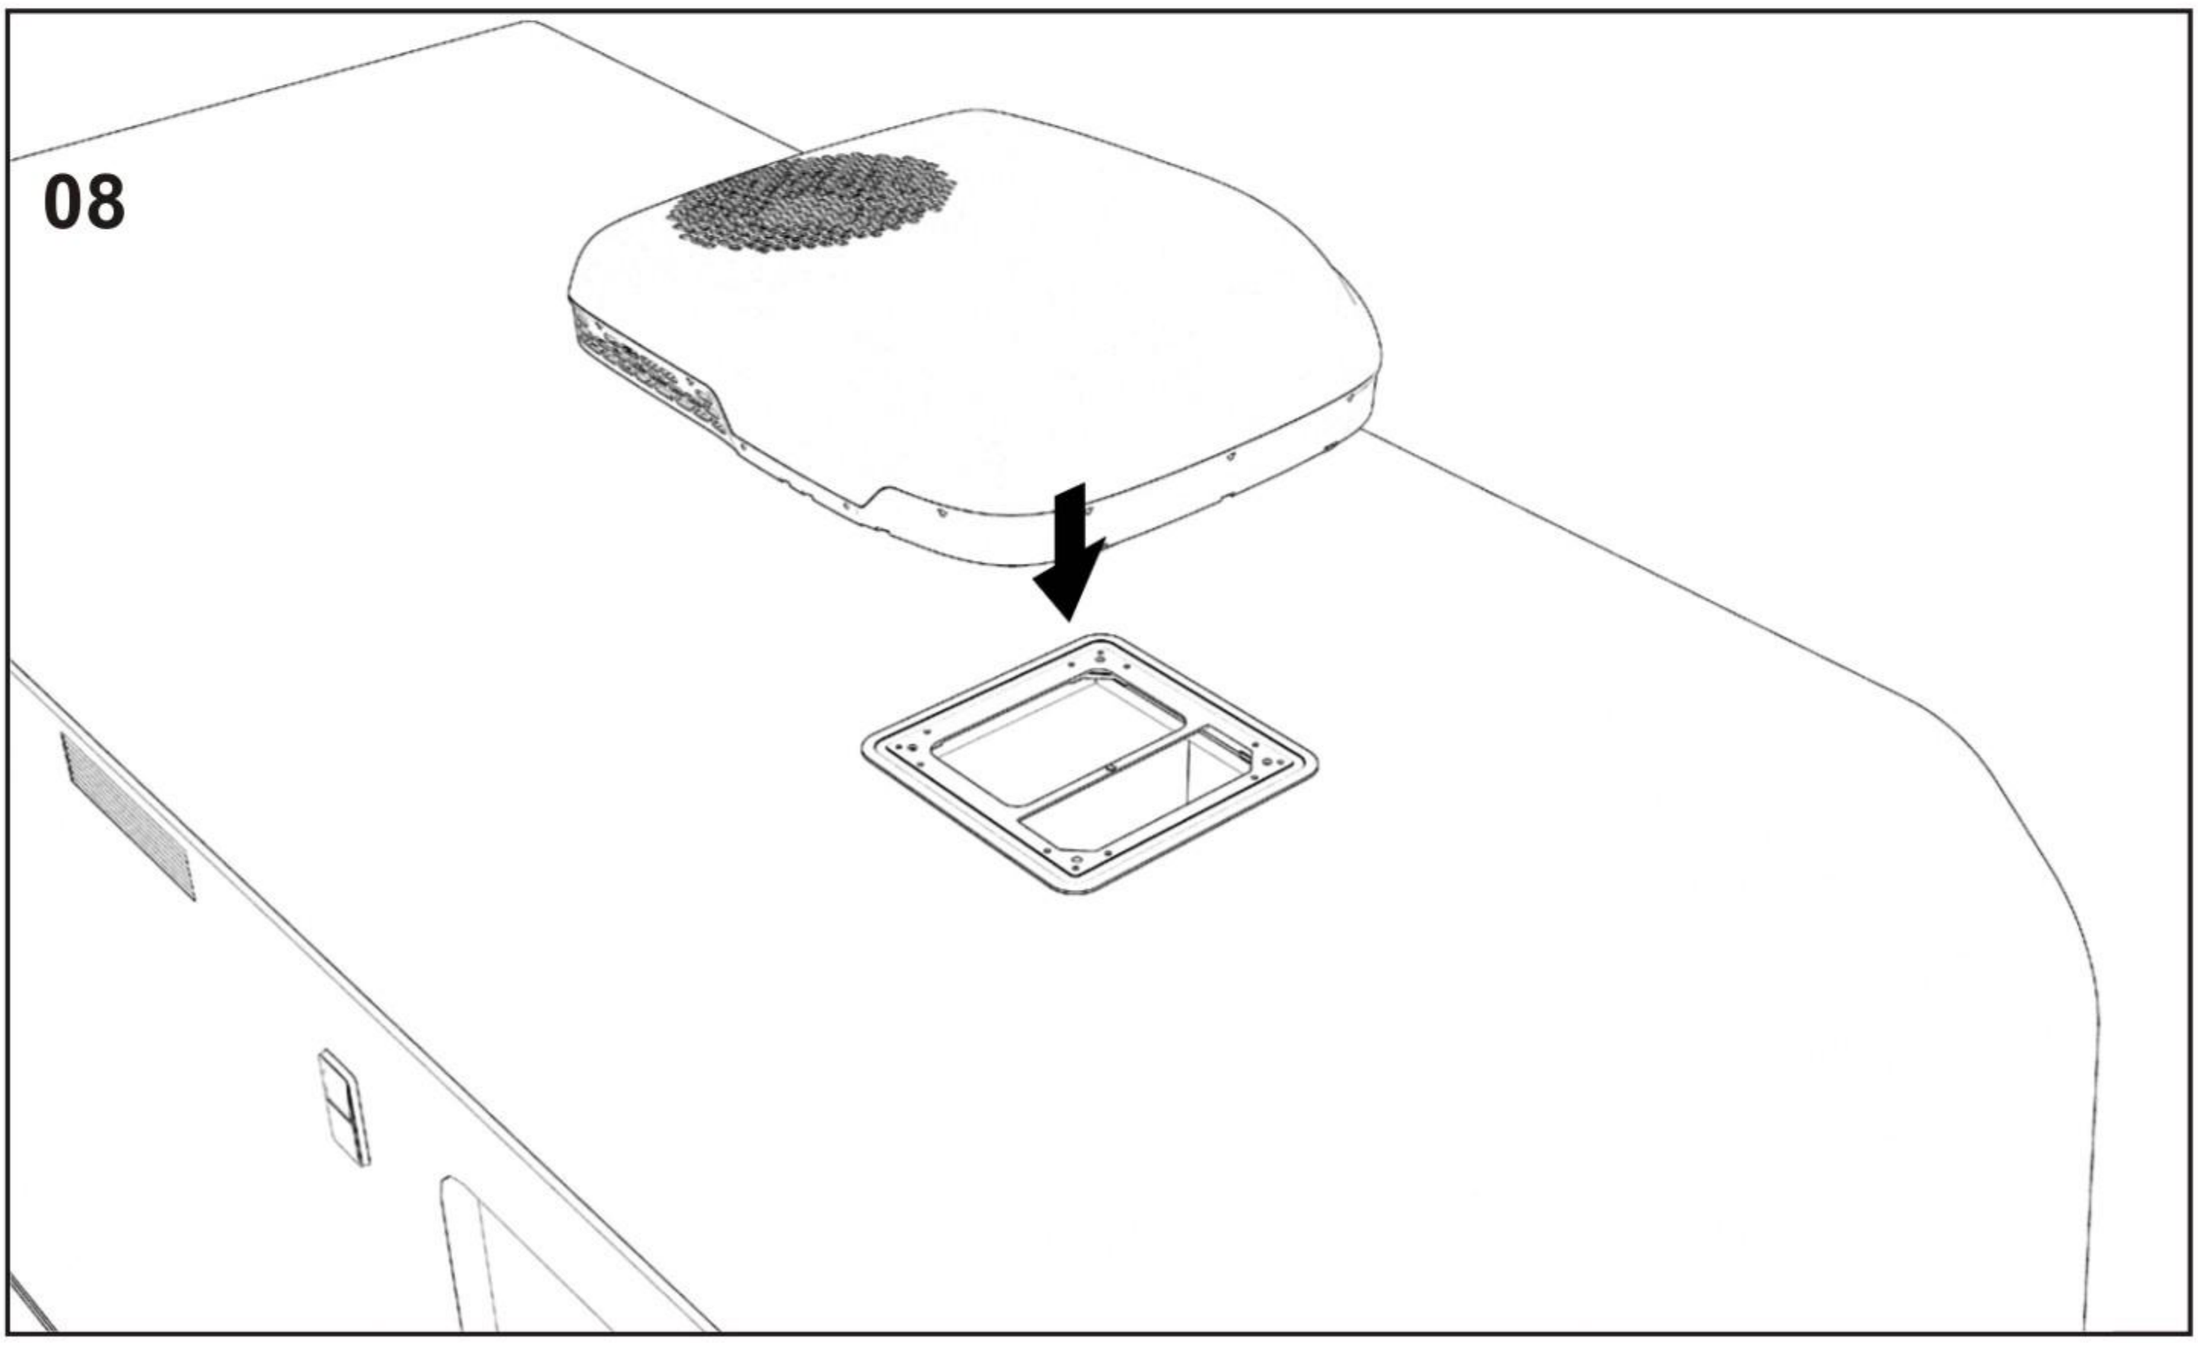

• The condenser coil goes toward the rear of the vehicle. See FIG.9.

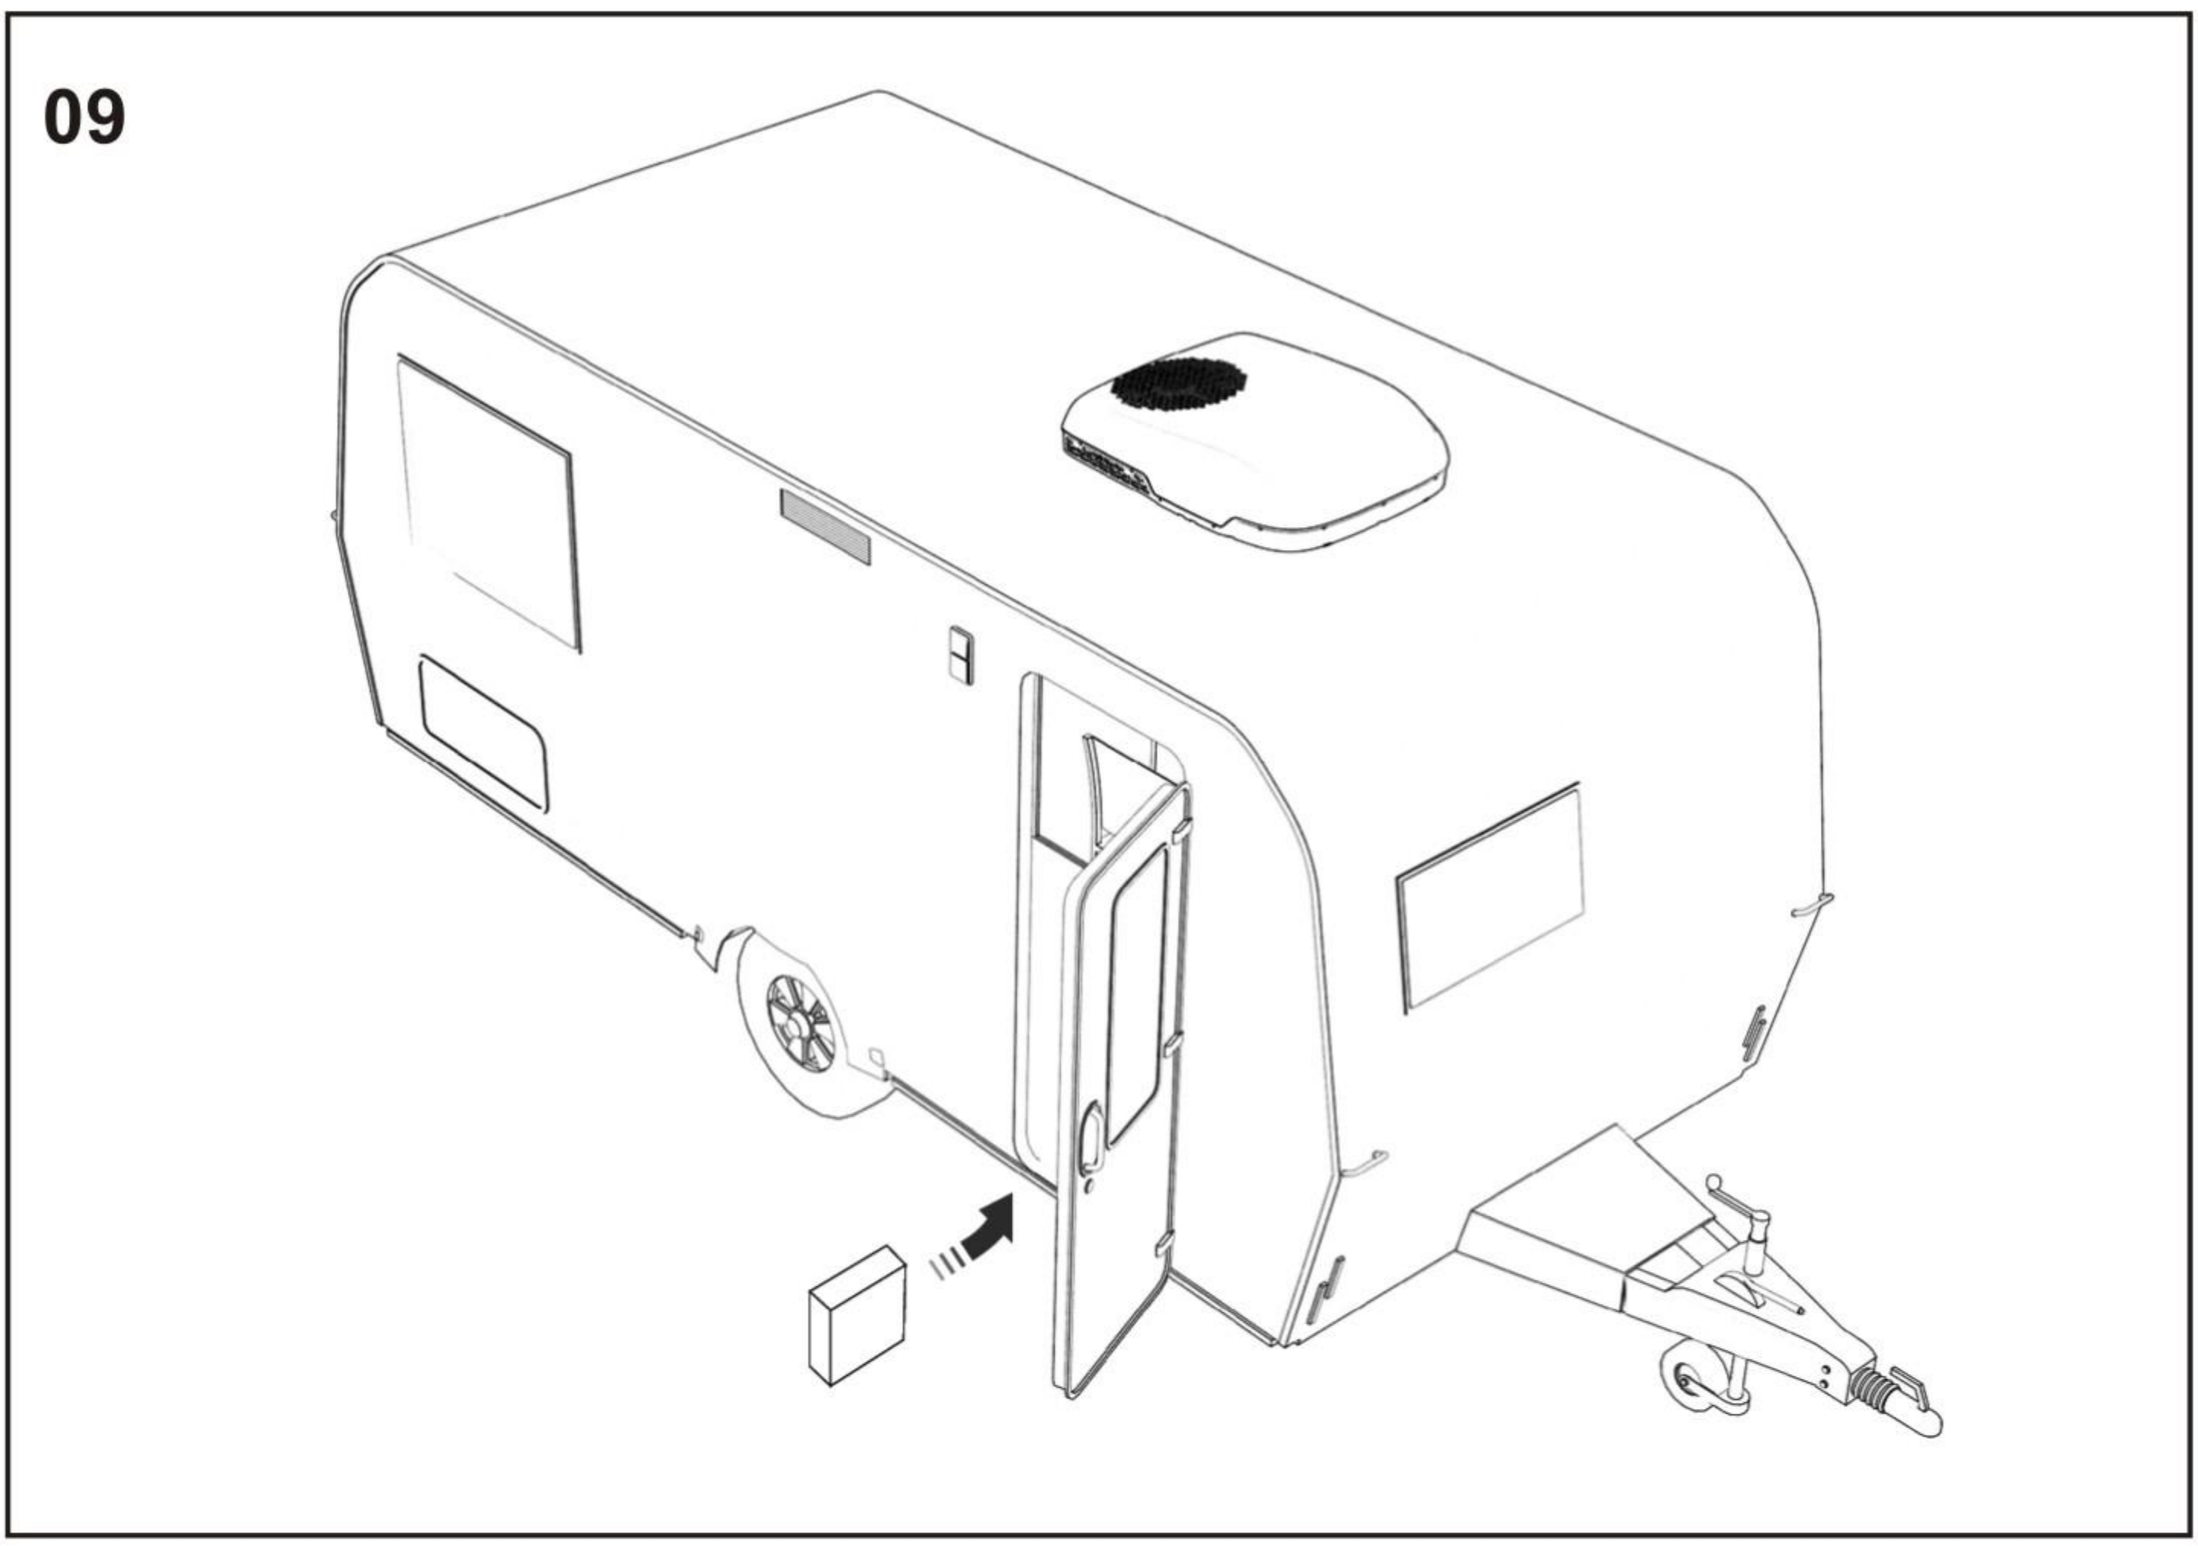


5.4 Wiring the system

⚠ DANGER!

- Disconnect 220-240V AC. Failure to follow these instructions could create a shock hazard causing death or severe personal injury!
- This product is equipped with a 3 wire (grounded) system for protection against shock hazard. Make sure that the appliance is wired into a properly grounded 220-240V, 50/60Hz AC Circuit and the polarity is correct. Failure to do so could result in death, personal injury or damage to the equipment.
- Take the wiring from the return air outlet and connect it to the connector, and then connect it with the prepared 220-240V power supply at the roof opening.

• Take out the communication cable and leave it there for next step connection later. See FIG.10.

10

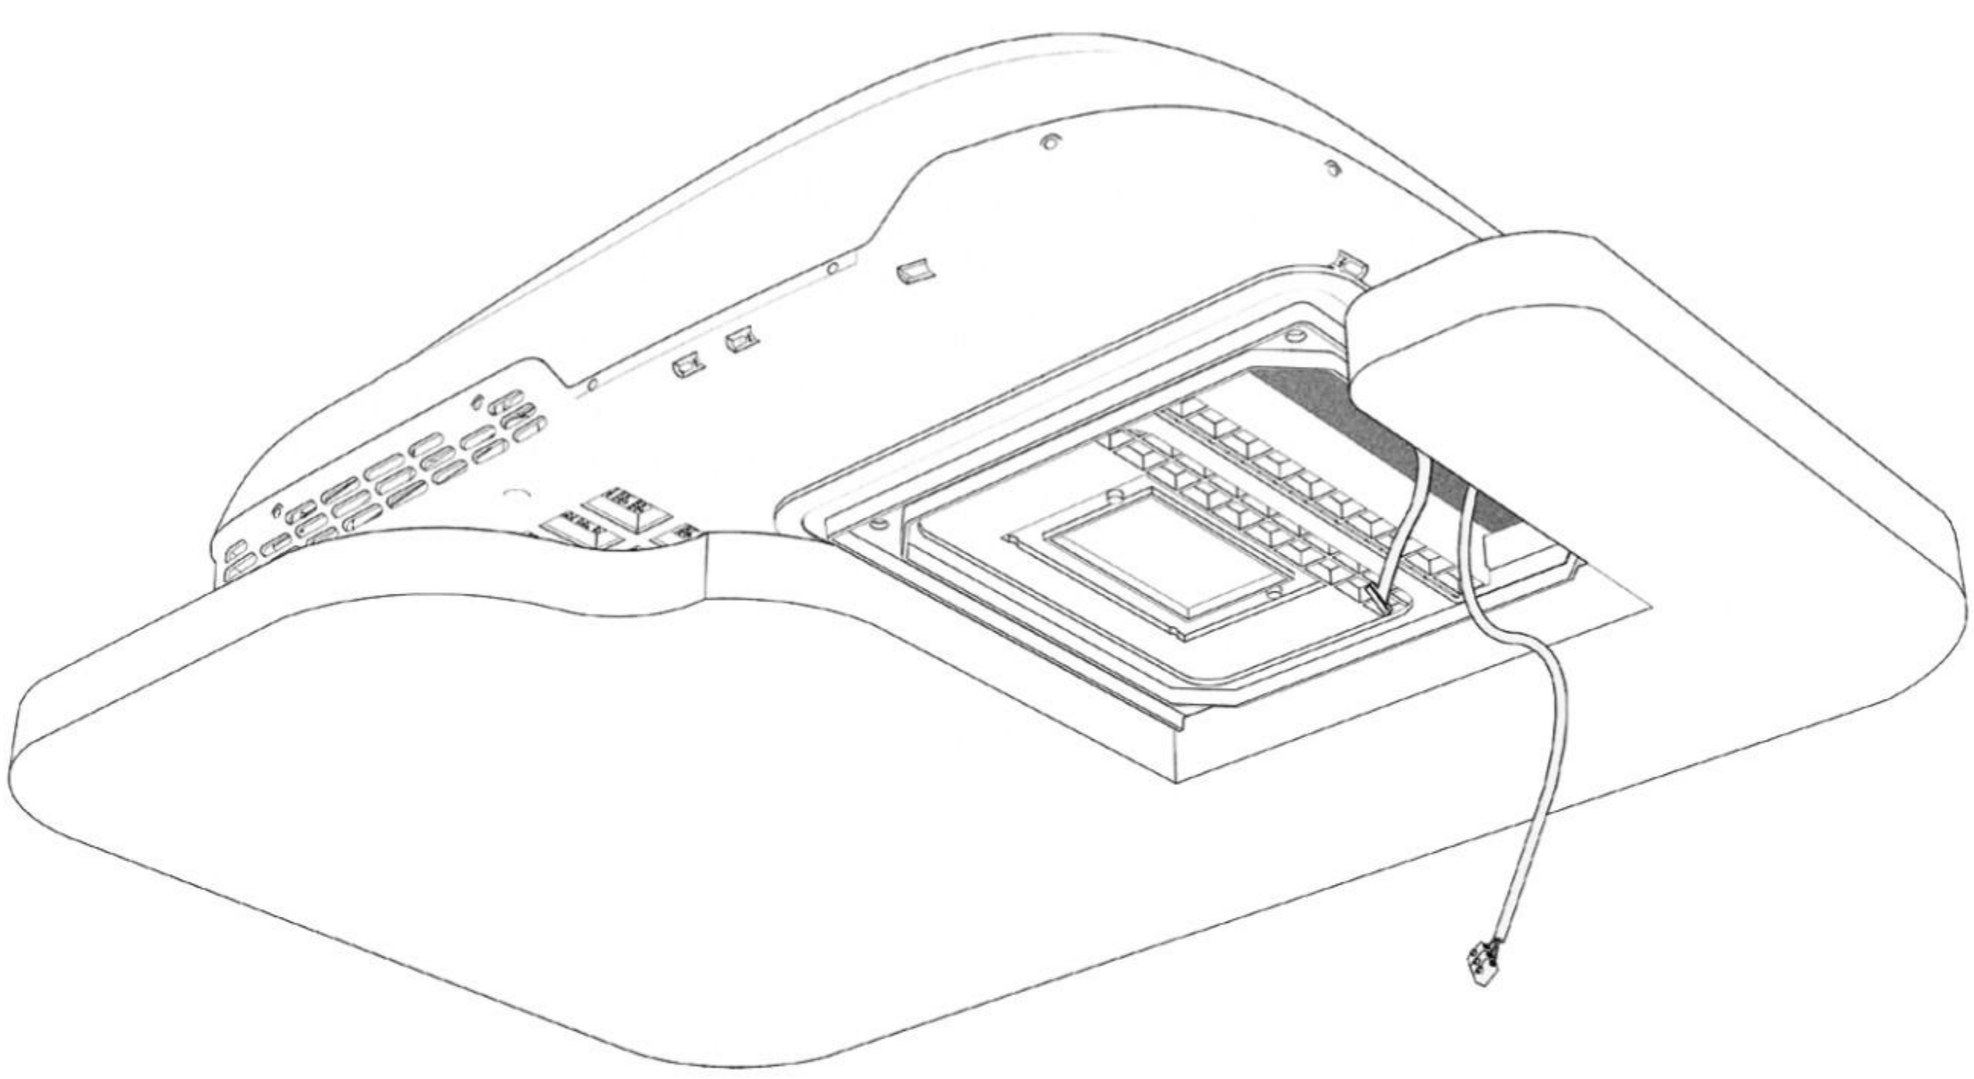


! NOTE!

• All wiring must be done by qualified personnel and comply with the national and local wiring codes and/or regulations.

5.5 Installing discharge duct and mounting bracket


- Take out air diffuser, roof mounting bracket, air duct blocks and fasteners from the carton.
- Fasten the roof mounting bracket, roof mounting frame and rooftop air conditioner together with 4 long bolts M6 x 120mm, and the tightening torque is 2.5Nm±0.3Nm. See FIG.11.
- **DO NOT OVERTIGHTEN OR DAMAGE MAY OCCUR**

11

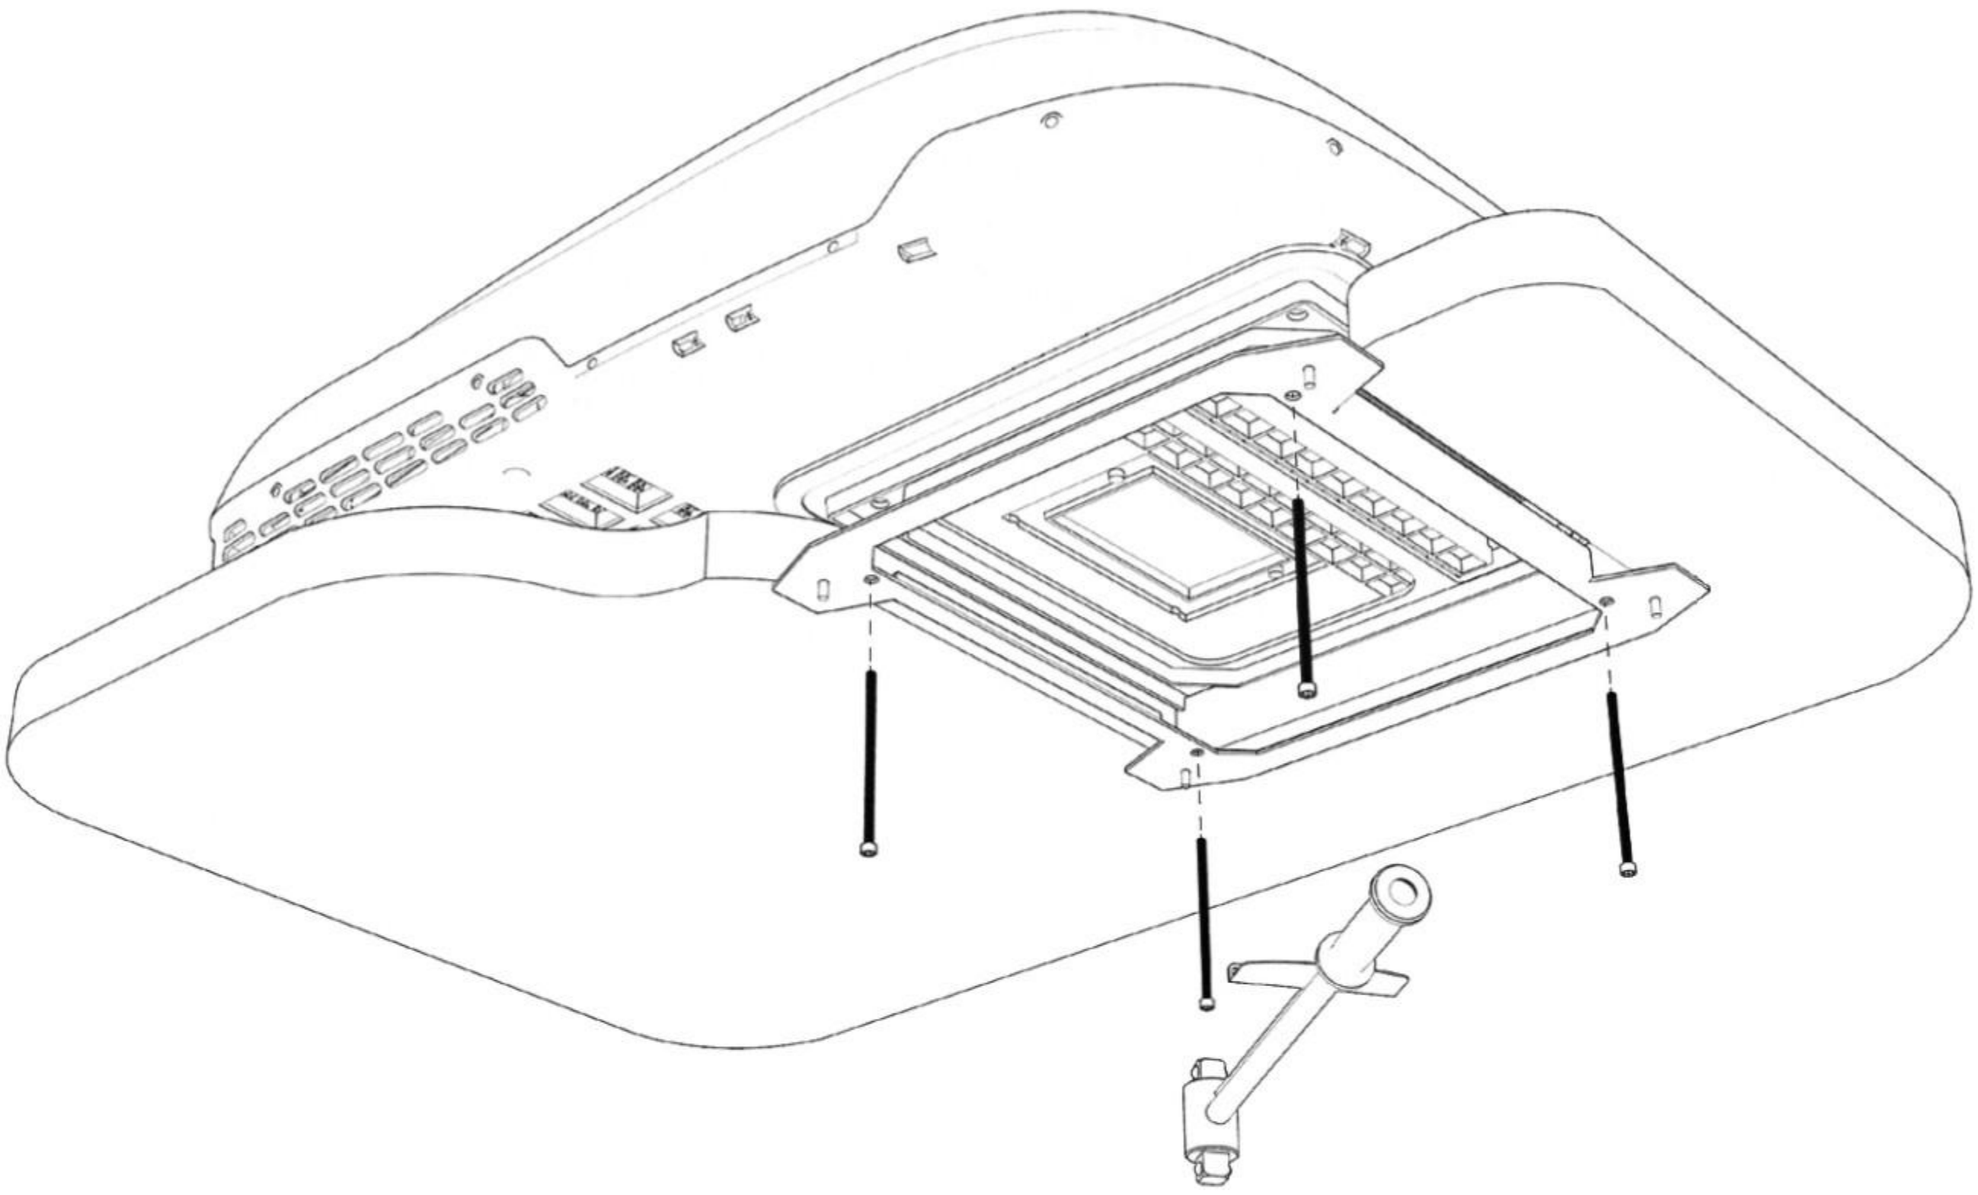


- According to the thickness of the roof, determine how many air duct blocks to use, and then install the blocks to the air outlet on base pan of rooftop air conditioner. See FIG.12.

12

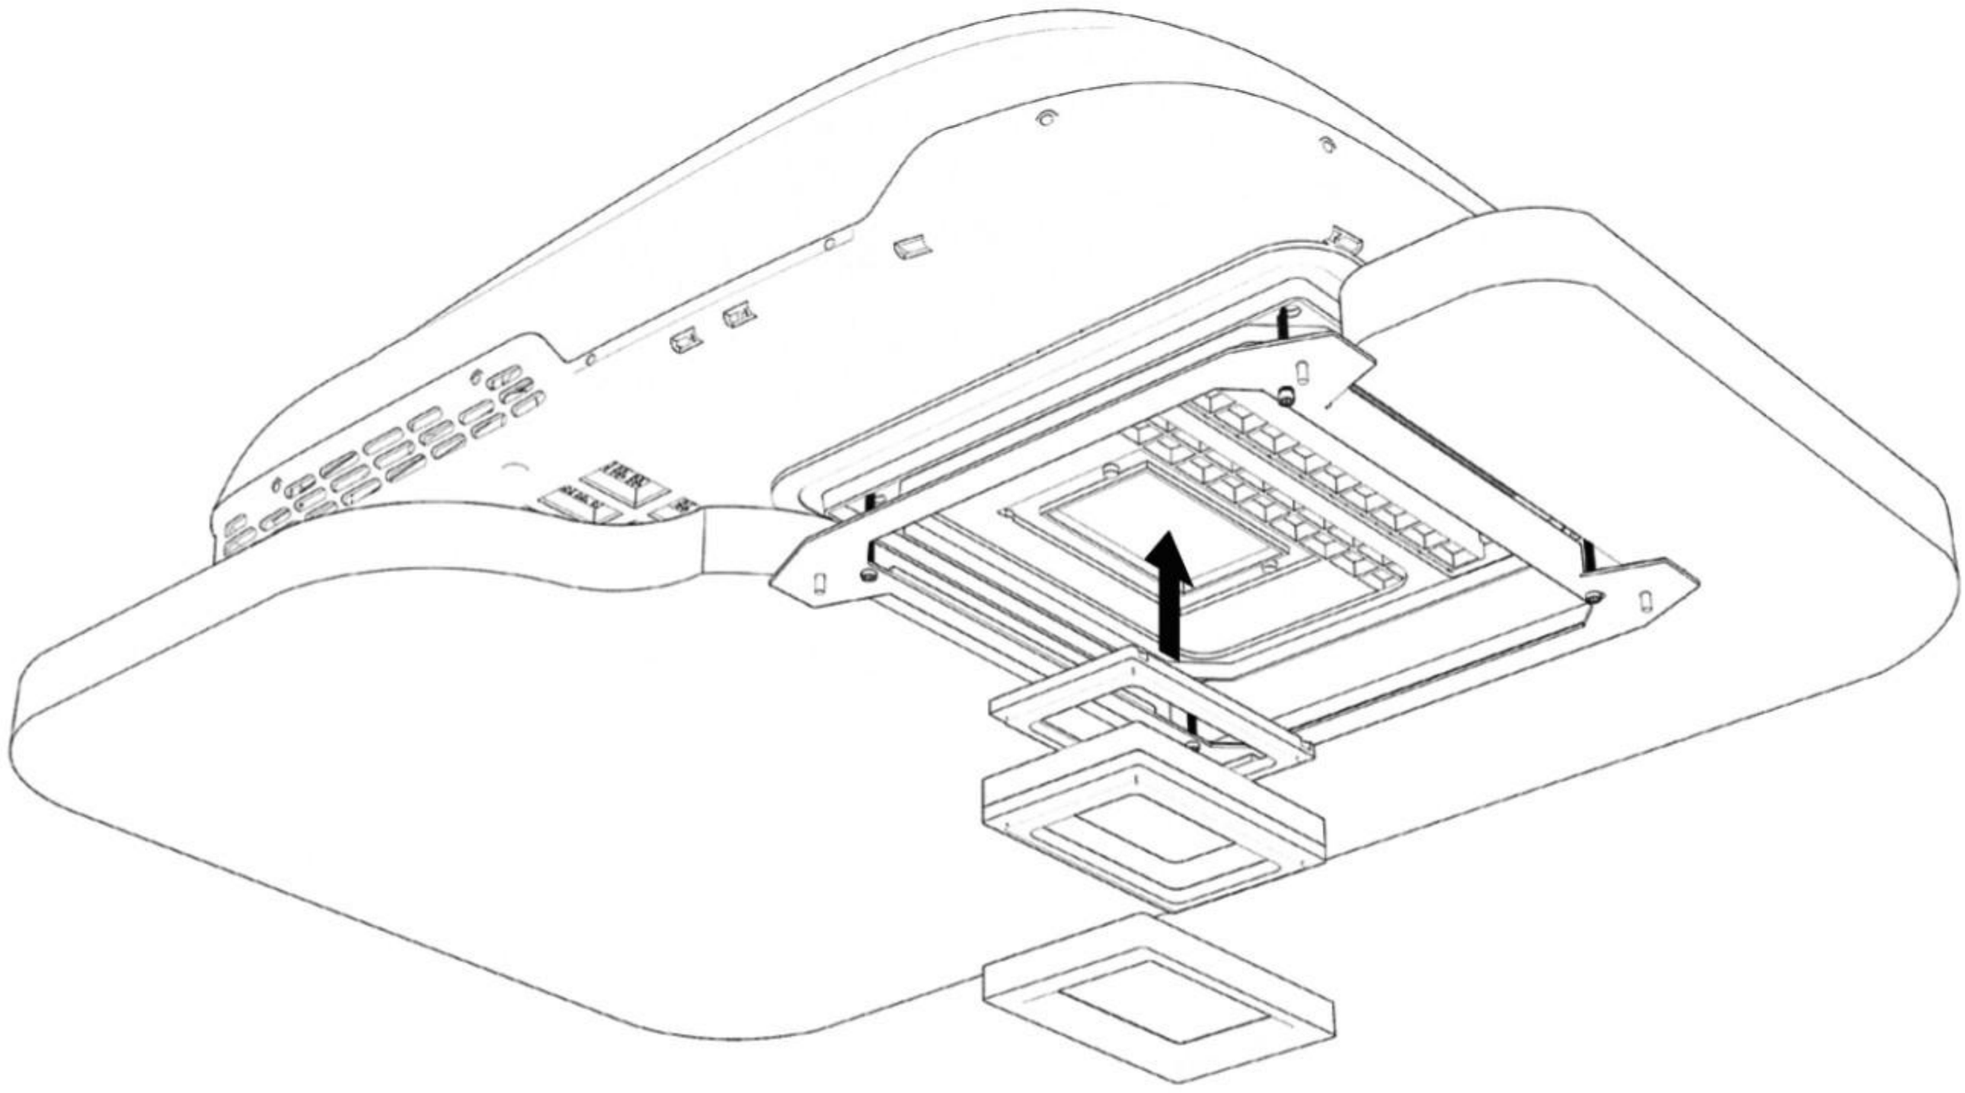

- Pull out the air filter and take out the communication cable from the air diffuser, connect it with the cable from the rooftop air conditioner.
- Install the air diffuser to roof mounting bracket with 4 nuts M6, then push the screw hole covers into the slots. See FIG.13.

13

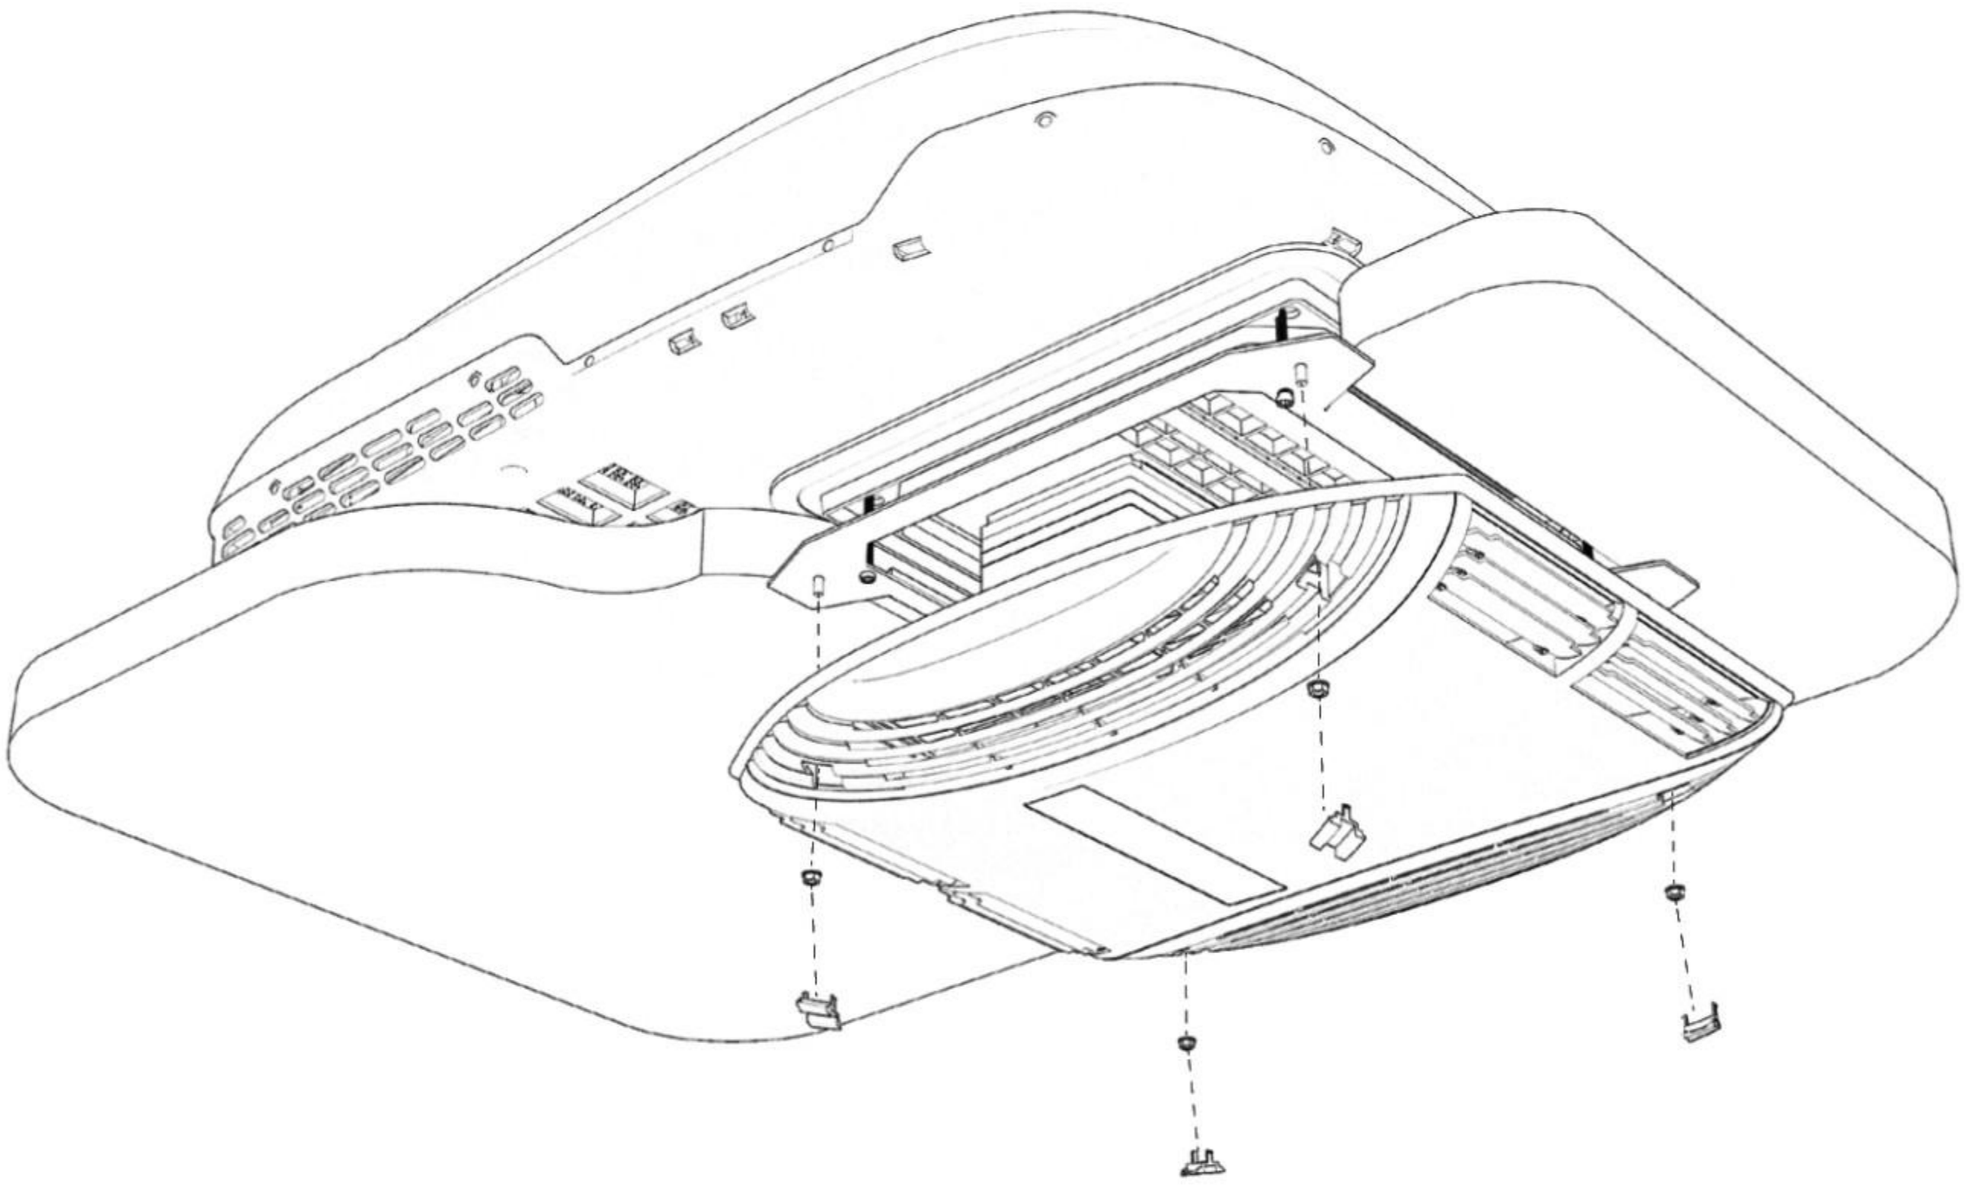


! NOTE!

- Check the thickness of the vehicle roof, the air duct is made of EPP material, which is divided into three parts: the bottom block, middle blocks and top block. The thickness of each middle block is 10 mm, which is suitable for maximum 100 mm roof thickness. Add or subtract the blocks as needed.



- If needed, the air diffuser can be fixed to the ceiling with 4 screws.
  Then push air filters into the correct place of air diffuser. See FIG.14.

14

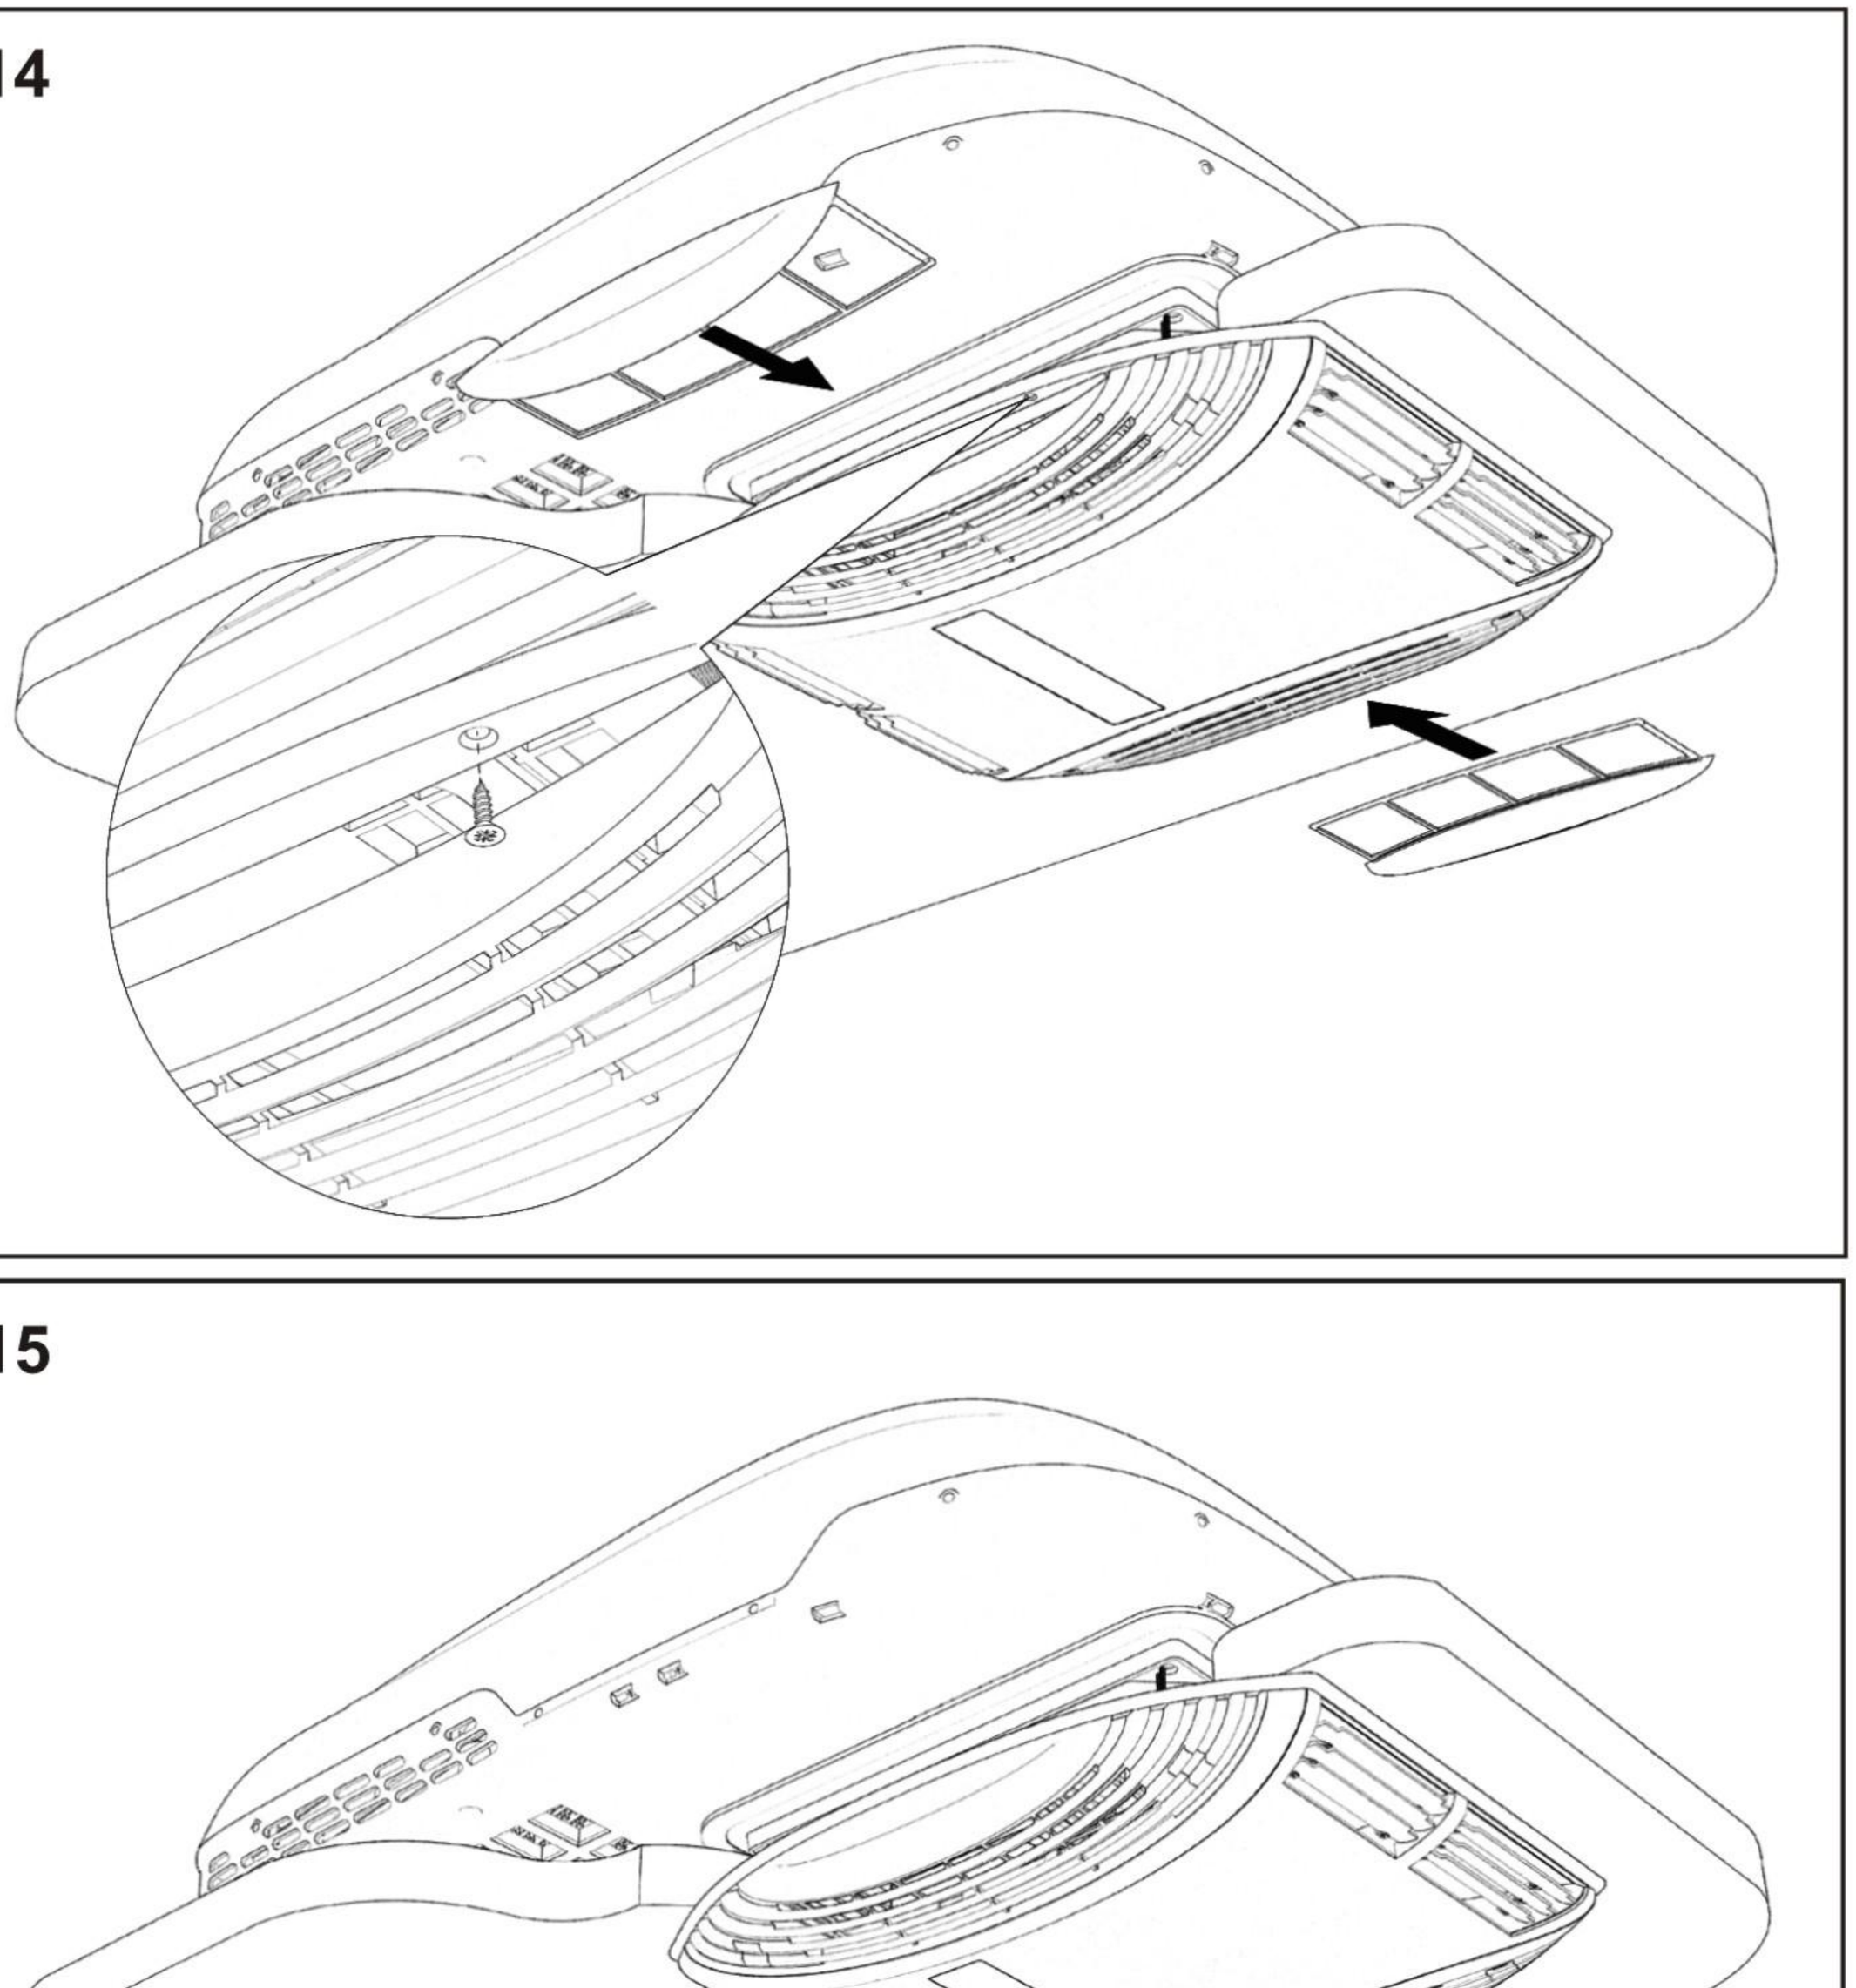

15

6.0 Initial use

6.1 Inspection before starting up

Before you switch on the rooftop air conditioner, observe the following:

- Check whether the supply voltage corresponds to the values specified in the data plate.
- Ensure both the air intake opening and the air nozzles are free. All ventilation grilles must always be kept free to ensure that the rooftop air conditioner is able to operate at maximum capacity.

⚠ ATTENTION!

- Do not insert your fingers or objects into the air nozzles or the intake grill. Beware of injury!

6.2 Checking remote control and insert batteries

The battery compartment is located on the lower back of the remote control.

- Gently push down the sliding lid out of the guide slot and remove it.
- Insert the new batteries (2 x type AAA) in the remote control as indicated in the battery compartment.
  (Please use good quality batteries only)
- Push the sliding lid into the guide slot, and push up to close it.



7.0 Operating the rooftop air conditioner

7.1 Basic notes on operation

The following operations can be achieved by touching the control panel.

Operating mode	Features
On/Off	Press ⏻ to switch on the rooftop air, press and hold it for 3 seconds to switch it off.
Mode selection	Press M to select five operating modes in order, Automatic, Cooling, Dehumidification, Ventilation and Heating.
Fan speed adjusting	Press ✣ once, the fan speed will increase one level, and becomes Auto after level 4.
Temperature adjusting	To set up the temperature by pressing ⊕ or ⊖

In addition to the above operations, the remote control can also perform the following operations:

- Sleep function
- Turbo function
- LED light
- Timer function
- Celsius/Fahrenheit conversion

7.2 Operating instructions of remote control

- The remote control lights up the display screen 2 seconds after the batteries are installed, and enters the standby state after displaying 16 °C for 6 seconds.
- In the OFF state, exception the LED light and the power button, other buttons do not work, and the screen backlight will go out after 6 seconds.
- In the ON state, press the corresponding button to transmit the signal.
  Please note that the remote control needs to face the infrared receiver on the air diffuser.

Button	
On/Off	Press to switch on the rooftop air, press and hold it for 3 seconds to switch it off.
Mode selection	Press to select five operating modes in order, Automatic, Cooling, Dehumidification, Ventilation and Heating.
Fan speed adjusting	Press once, the fan speed will increase one level, and becomes Auto after level 4.
Sleep function	Press ,the compressor and fan will run at low speed. The initial temperature setting is 26 °C . You can adjust the temperature setting with or . The fan speed is locked at level 1, and can't be adjusted . Press again and return to normal mode.
Turbo function	Press ,the compressor and fan will run at the maximum speed. The temperature can be set by pressing or . The fan speed is locked at level 4, and can't be adjusted. Press again and return to normal mode.
LED light	Press , to switch on or off the LED light on air diffuser.
Timer function	Press , to set the Switch-Off time of the rooftop air conditioner. Each time you press it, the time will increase by 0.5 hours, and the maximum setting is 12 hours.
Celsius/Fahrenheit conversion	Press , to display Celsius or Fahrenheit.

7.3 Operating instructions of Bluetooth APP

- Download MyCOOLMAN Air Conditioner APP from Google Play Store or APP Store depending on requirements.
- Ensure MyCOOLMAN AC is within Bluetooth range and has power.
- Open the MyCOOLMAN AC APP.
- Select and connect to relevant MyCOOLMAN AC.
- Use the APP to control and operate the MyCOOLMAN AC Unit.

NOTE: Bluetooth MUST be turned on on the smart device being used.

IMPORTANT: The CCA2700i has White coloured lighting integrated in the ADB – Multicolour selection via the APP is NOT possible on this model.

8.0 Cleaning and maintenance

⚠ WARNING!

- Any other maintenance work to that which is described here may only be carried out by qualified personnel who are familiar with the risks involved when handling refrigerant and air conditioning systems as well as the relevant regulations.

⚠ ATTENTION! Beware of damage

- Do not clean the rooftop air conditioner with a high-pressure cleaner. Exposure to water can damage the rooftop air conditioner.
- Do not use sharp or hard objects or cleaning agents for cleaning as these may damage the rooftop air conditioner.
- To clean the rooftop air conditioner, use water with a gentle cleaning agent. Never use petrol, diesel or solvents.

Cleaning the rooftop air conditioner

- Clean the housing of the rooftop air conditioner and the air outlet unit occasionally with a damp cloth.
- Regularly remove leaves and other dirt from the ventilation grilles of the rooftop air conditioner. Make sure you do not damage the grilles in the process.
- Regularly clean the air filters on both side of air diffuser with warm water, and reinstall them after drying.
- Clean the remote control with a slightly damp cloth from time to time. We recommend using a cleaning cloth for glasses to clean the display.

Maintenance of the rooftop air conditioner

- Regularly check whether the condensation water drainage channels at the sides of the rooftop air conditioner are clear and the condensation water is able to escape.
- Check the seal between the rooftop air conditioner and the roof of the vehicle for cracks and other damage once per year.

9.0 Troubleshooting

If the rooftop air conditioner fails, the fault light on the upper right corner of the display will light up and the Error code will be displayed.

Fault Code	Fault	Cause	Remedy
E1	Exhaust temperature sensor failure	Need to check the sensor is in open circuit or short circuit, and error code appears.	Check the outdoor venting temperature-control coil of compressor (the compressor high pressure outlet pipe) is connected or not and detect the resistance whether is about 50KΩ or not (50KΩ at 25 °C). If the wire is connected well and the resistance shows in normal, it needs to replace the controller.
E2	Internal fan failure	Indoor fan has no signal for 20s continuously and error code appears	Check the terminal voltage (DC) of GND (the black wire) and VSP (the yellow wire) at the controller. If the voltage is 2-7V, it outputted with control signal. If the voltage is below 2V or above 7V, the controller is damaged. Detect the terminal voltage of HV (the red wire) and GND (the black wire), and the normal output voltage is 310V. If it is detected without power, the controller is damaged. If the voltage shows in normal with both lines, the fan motor is damaged.
E3	Outdoor fan failure	Outdoor fan has no signal for 20s continuously and error code appears	Check the terminal voltage (DC) of GND (the black wire) and VSP (the yellow wire) at the controller. If the voltage is 2-7V, it outputted with control signal. If the voltage is below 2V or above 7V, the controller is damaged. Detect the terminal voltage of HV (the red wire) and GND (the black wire), and the normal output voltage is 310V. If it is detected without power, the controller is damaged. If the voltage shows in normal with both lines, the fan motor is damaged.
E4	Ambient temperature sensor failure	Check the sensor is in open circuit or short circuit, and error code appears.	Check the indoor ambient temperature-control coil is connected or not and detect the resistance whether is about 10KΩ (10KΩ at 25 °C). If the wire is connected well and the resistance shows in normal, it needs to replace the display panel.
E5	Indoor coil sensor failure	Check the sensor is in open circuit or short circuit, and error code appears.	Check the indoor temperature-control coil (at the middle of U-type pipe of the evaporator) is connected or not and detect the resistance whether is about 10KΩ (10KΩ at 25 °C). If the wire is connected well and the resistance shows in normal, it needs to replace the controller.

Fault Code	Fault	Cause	Remedy
E6	Outdoor coil temperature sensor failure	Check the sensor is in open circuit or short circuit, and error code appears.	Check outdoor temperature-control coil (the outlet pipe of the condenser) is connected or not and detect the resistance whether is about 10KΩ (10KΩ at 25 °C). If the wire is connected well and the resistance shows in normal, it needs to replace the controller.
E7	Outdoor temperature sensor failure	Check the sensor is in open circuit or short circuit, and error code appears.	Check the outdoor temperature-control coil is connected or not and detect the resistance whether is about 10KΩ (10KΩ at 25 °C). If the wire is connected well and the resistance shows in normal, it needs to replace the controller.
E8	PFC failure	The boost circuit of drive board is abnormal and error code appears.	Replace the controller.
E10	Communication failure between logic chip and display panel	Abnormal communication between display panel logic chip and receive without data	1. The wire not connected correctly. 2. The controller is damaged.
E11	Communication failure between logic chip and driver chip	Abnormal communication between driver chip and logic chip for a minute continuously and error code appears.	Replace the controller.
E12	Overcurrent protection of the compressor hardware	The error code FO appears from compressor drive board IPM when it is considered as the hardware protection.	The controller is damaged.
E13	Compressor three-phase software overcurrent protection	Compressor U/V/W three-phase current is above 15A and the software overcurrent protection works.	The indoor coil of compressor is in short circuit or the controller is damaged.
E14	Compressor rotor locked protection	When the rotational speed of compressor is above 8000r or below 100r for 10s continuously, the rotor locked protec-tion works.	Use the multimeter with AC power to detect the voltage with U/V/W. Any two-phase voltage is 5-150V that means the compressor is damaged with this transient voltage. If it is without this voltage that means the controller is damaged.


Fault Code	Fault	Cause	Remedy
E15	Compressor stall protection	When the difference between setting rotational speed and the actual speed of compressor is 300r and continues for 10s, the error code appears.	The controller is damaged.
E16	Under-voltage protection	The under-voltage works when the input voltage is below 160V.	Detect the input voltage. If the voltage is below 160V, check the power supply. If the input voltage is above 160V, it needs to replace the controller.
E17	Over-voltage input	The over-voltage protection works when the input voltage is above 265V.	Detect the input voltage. If the voltage is above 265V, check the power supply. If the input voltage is below 265V, it needs to replace the controller.
E19	The system failure (Lack refrigerant protection)	Compressor starts working and records the temp of indoor coil pipe (PTSAVE), running after 5 mins (PT); Cooling mode: PT<PTSAVE-2, the system is normal, otherwise it is abnormal. Heating mode: PT>PTSAVE+2, the system is normal, otherwise it is abnormal.	1. Check the pressure of refrigerant, and the normal pressure runs not below 8psi. 2. If the pressure is normal, check the connection between the indoor temperature-control coil and indoor coil pipe. 3. When the temperature-control coil and indoor coil pipe are connected well and the pressure is normal, check the resistance of the indoor temperature-control coil whether is about 10KΩ (10KΩ at 25 °C). 4. If the situation mentioned above runs normally, it needs to replace the controller.
E21	The exhaust temp is above 110 °C.	Stopped working, and will run again when the temp reached below 85 °C.	1. The ambient temp is too high and the condenser is blocked with dirt. 2. The stop valve or the filter is blocked. 3. The fault detect with the controller or the venting temperature-control coil checks the temp is in fault.
E22	The temp of cooling outdoor coil pipe is above 65 °C.	Stopped working, and will run again when the temp reached below 58 °C.	1. The outdoor ambient temp is above 55 °C. 2. The windward side of the condenser is blocked with dirt. 3. The fault detect with the outdoor temperature-control coil or the controller checks the temp is in fault.
E23	The temp of heating indoor coil pipe is above 65 °C.	Stopped working, and will run again when the temp reached below 58 °C.	1. The windward side of evaporator is blocked with dirt. 2. The fault detect with the controller or the indoor temperature-control coil checks the temp is in fault.

Fault Code	Fault	Cause	Remedy
E24	The input AC of cooling or heating is above 7A.	Stopped working, will run again after 60 seconds.	1. The outdoor ambient temp is above 55 °C. 2. The controller is damaged. 3. The compressor is in short circuit.
E25	The temp of IPM panel is above 95 °C.	Stopped working, and will run again when the temp drops below 80 °C.	1. The ambient temperature is too high. 2. The controller is damaged.
E26	Phase loss protection	It detected one of U/V/W wires is in broken circuit and error code appears.	1. Check the connection between the controller and the wire U/V/W of compressor. 2. The controller is damaged.


! NOTE!

- Please contact the supplier for further assistance, this equipment must be repaired by a professional.


10.0 Wiring diagram

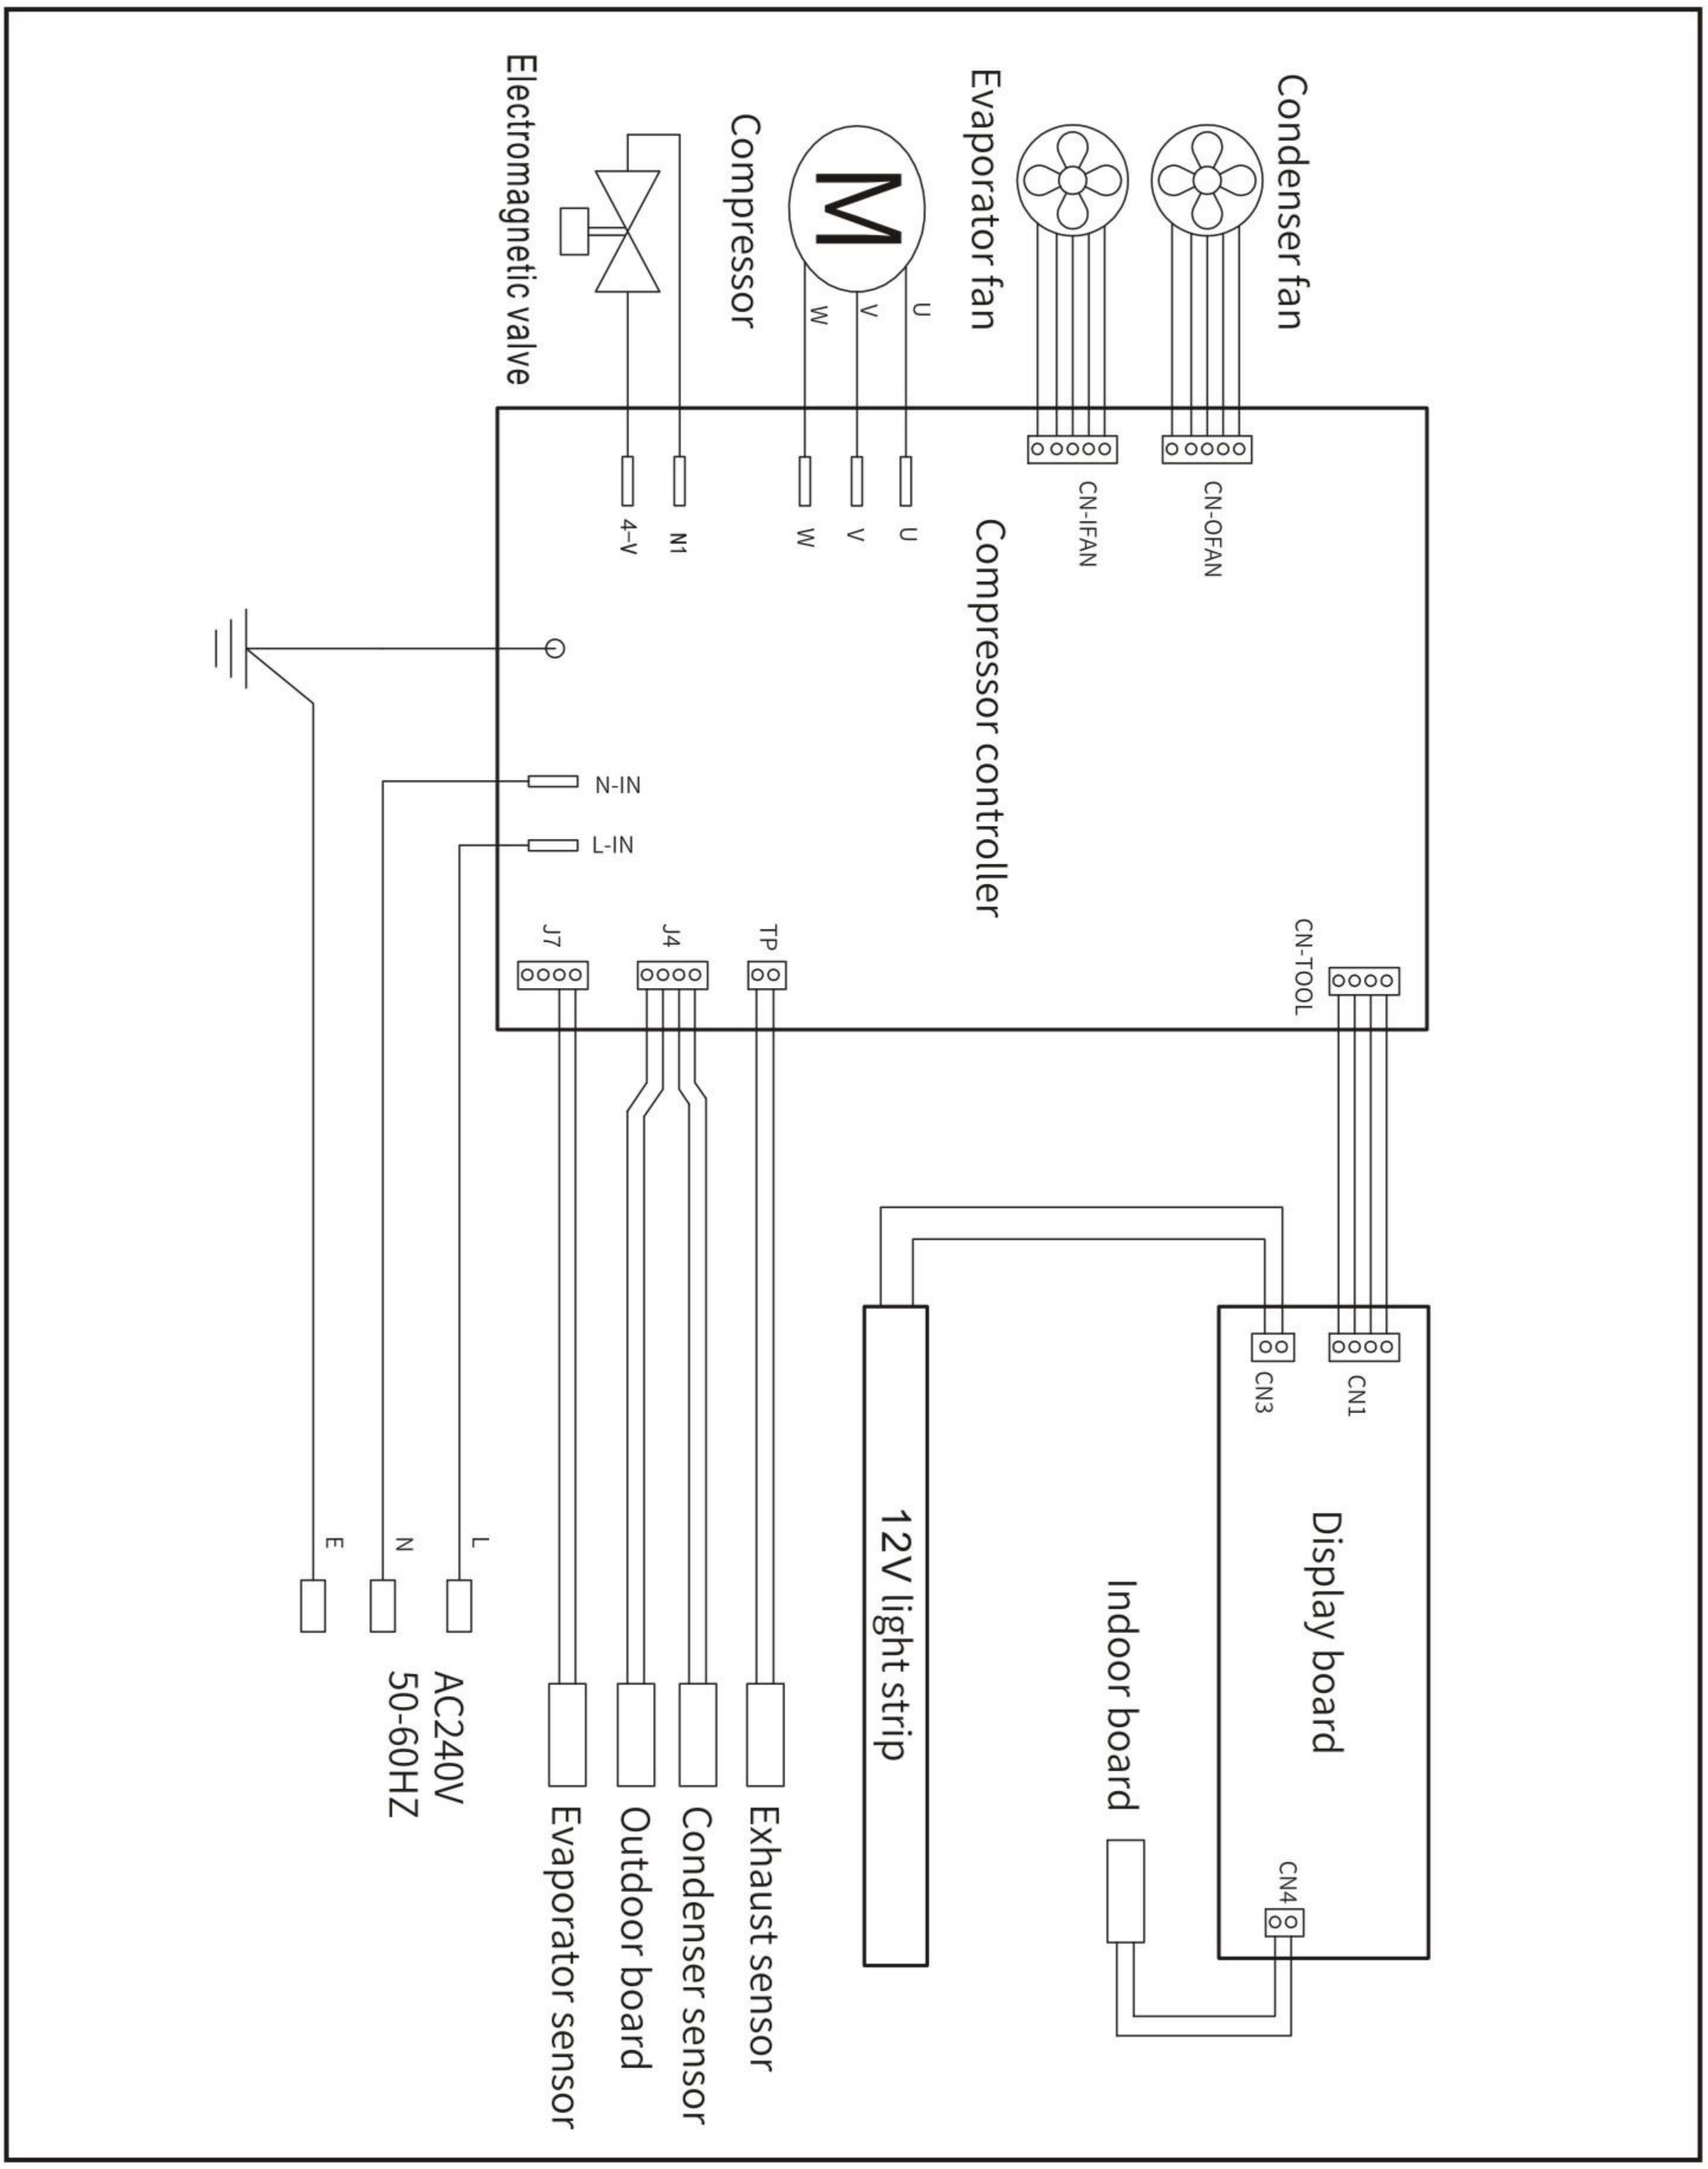

11.0 Parts list

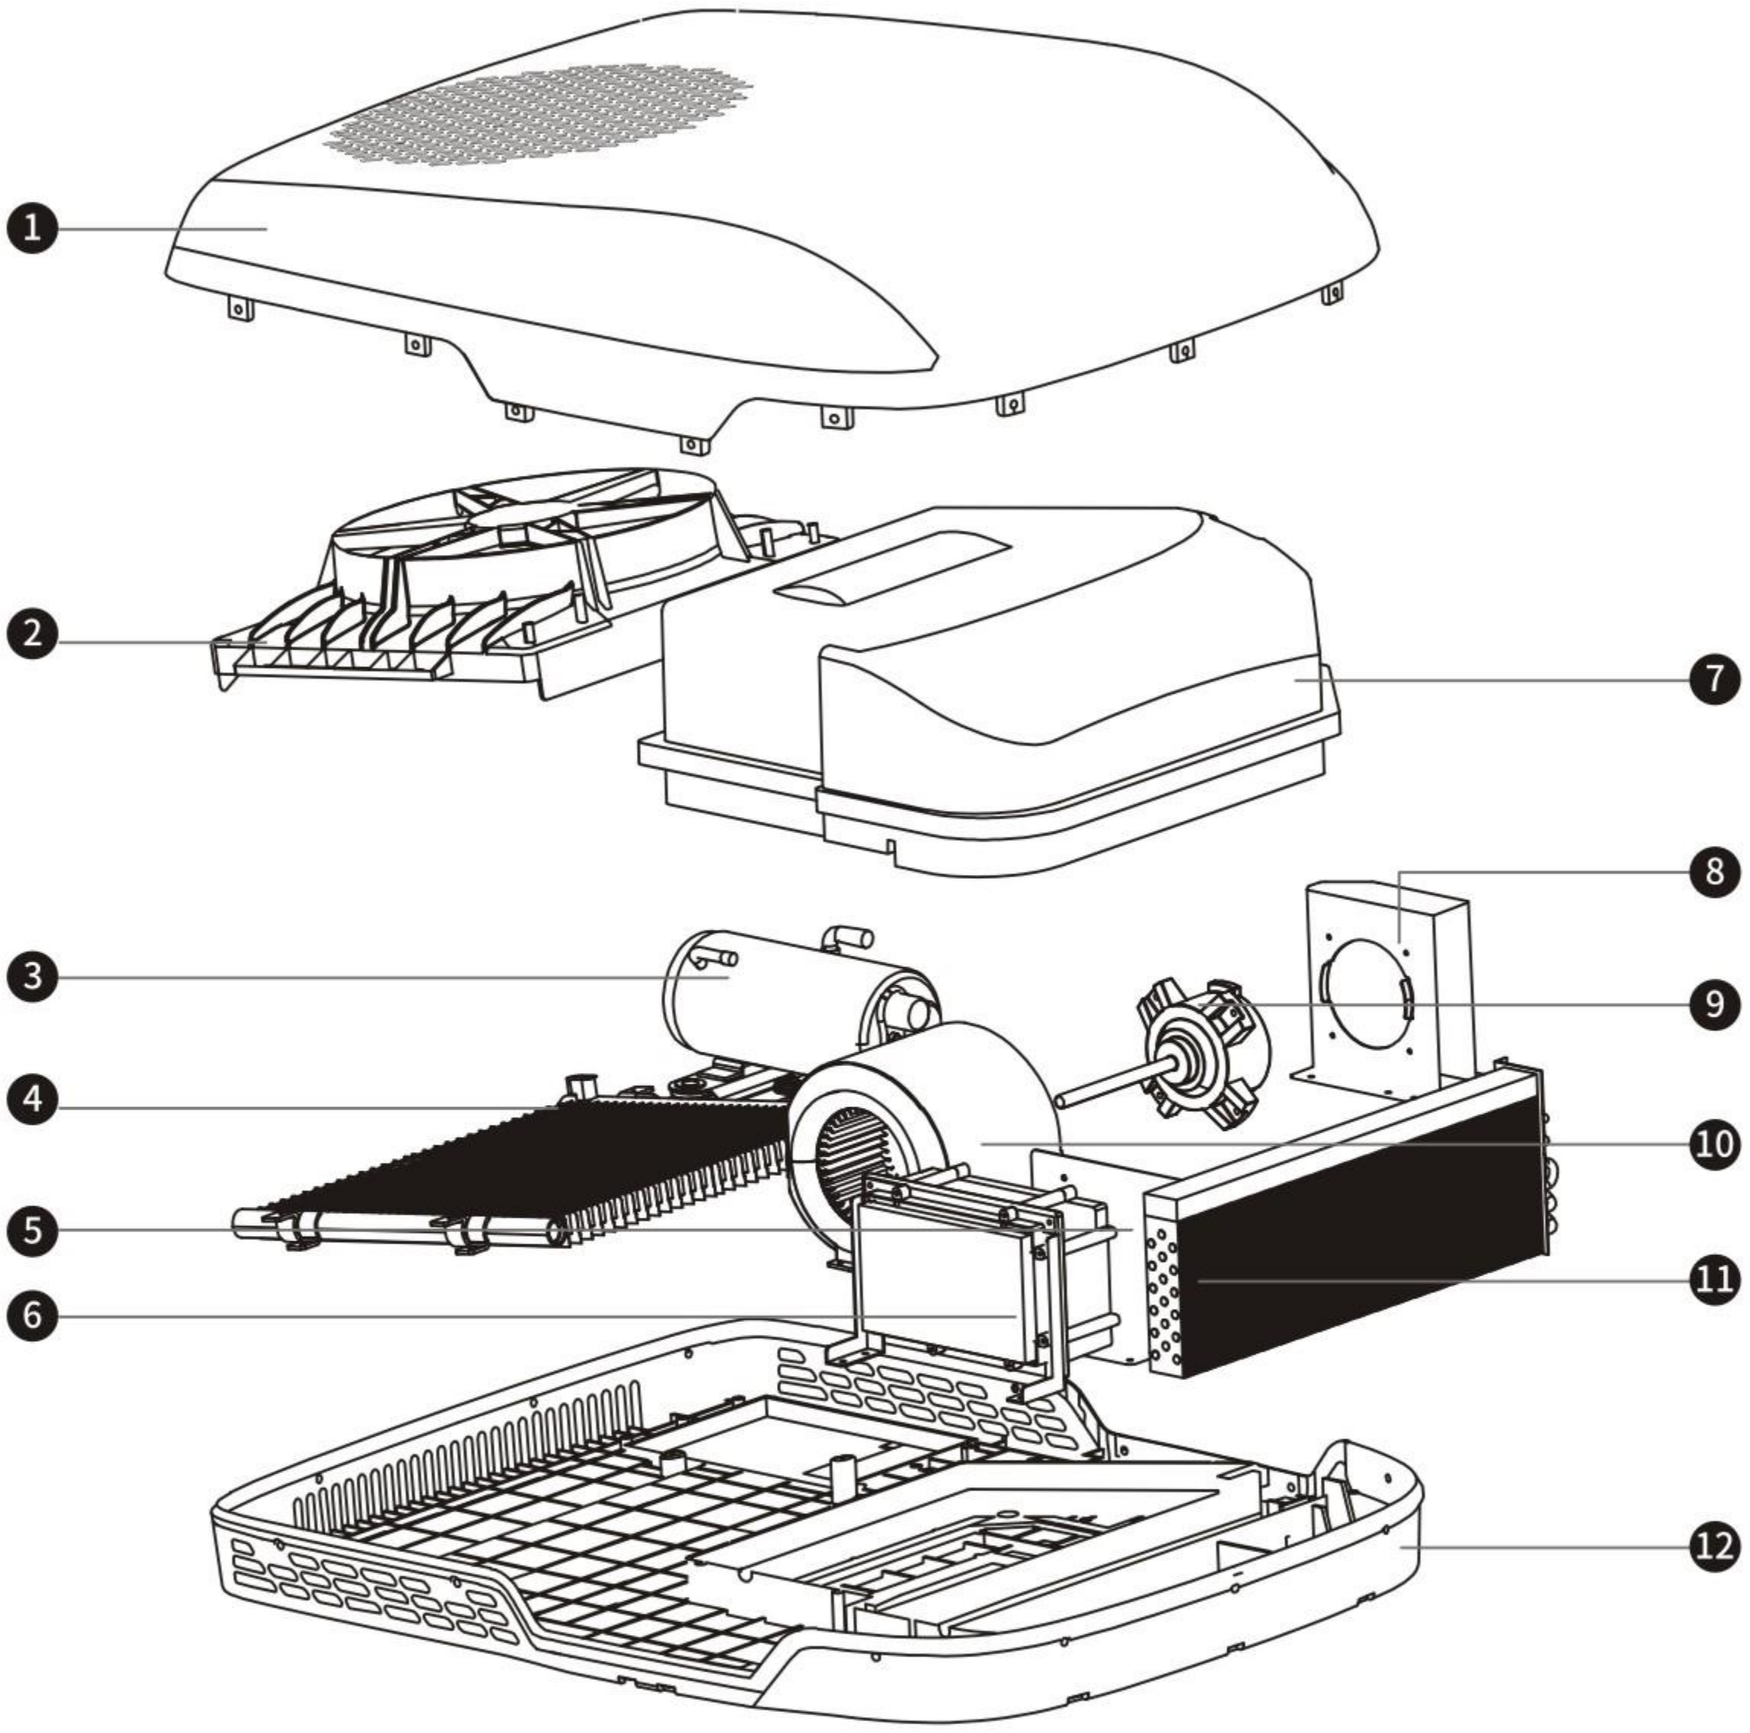

1	Housing	7	Evaporator insulation foam
2	Condenser fan cover	8	Motor mount
3	Compressor	9	Motor
4	Condenser	10	Evaporator fan volute
5	Controller box hardware	11	Evaporator
6	Controller box	12	Base pan

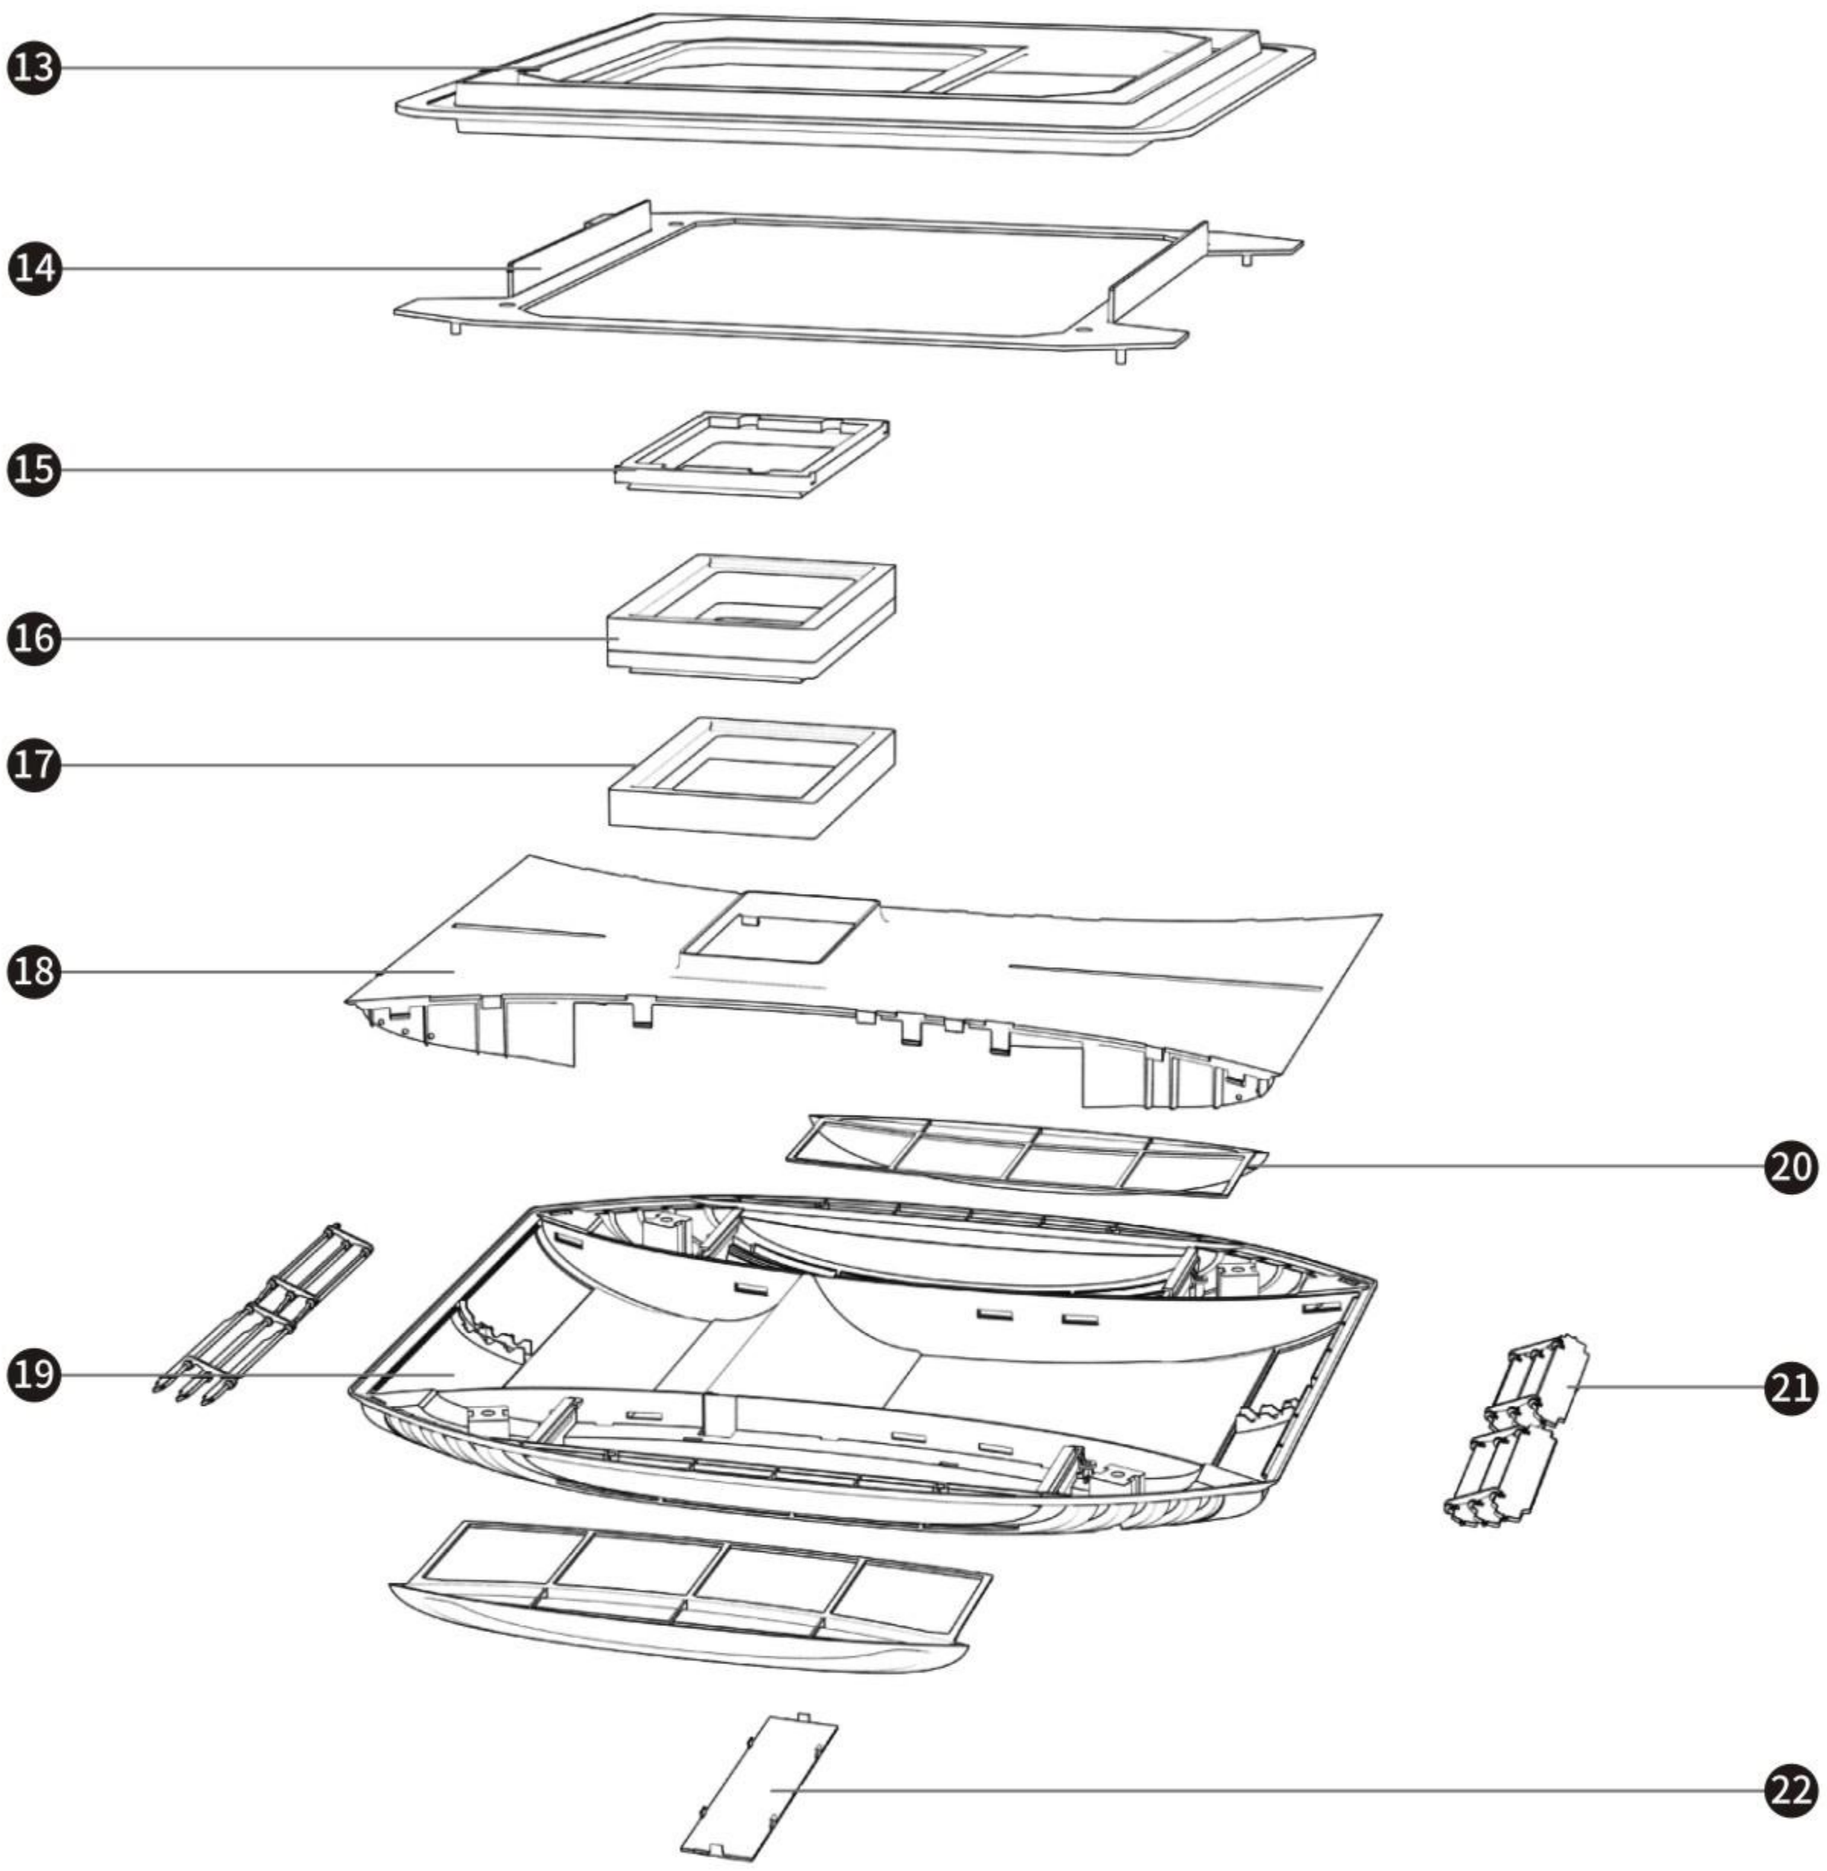

13	Roof mounting frame	18	Air diffuser base
14	Roof mounting bracket	19	Air diffuser
15	Air duct block-top	20	Air filter
16	Air duct block-middle	21	Blade
17	Air duct block-bottom	22	Control panel

12.0 Technical data

Model	CCA 2700i
Input voltage	220-240V
Cooling capacity	2700W
Cooling input power	1240W
Heating capacity	2500W
Heating input power	1050W
Cooling Rated Current	5.6A
Heating Rated Current	4.8A
Discharge pressure	3.9 MPa
Maximum allowable pressure	4.0 MPa
Suction pressure	1.7 Mpa
IP Rating	IP55
Circuit protection	20 Amp fuse or circuit breaker
Adjusting temperature	16 °C ~ 30 °C
Airflow	550 m^3/h
Operating temperature	-2 °C ~ 55 °C
Refrigerant	R410a
Refrigerant quantity	550g
Dimension L x W x H	920 x 765 x 220 mm
Main unit Net/Gross weight	33.7 Kg / 39 Kg
Accessories unit Net/Gross weight	4.7 Kg / 7.0 Kg

NOTE!

- To continuously improve our products, we reserve the rights to change some specifications without further notice, please check the data plate.

13.0 Warranty Terms & Conditions

When you buy myCOOLMAN Air Conditioner you have peace of mind knowing that it is backed by a comprehensive 3 year warranty against defects in materials and workmanship. The myCOOLMAN warranty is provided in addition to any rights provided under Australian Consumer Law. All claims under this warranty should be made by returning the product to the place of purchase at your expense, with the detail of the fault, proof of purchase and fitment details. If we determine that a myCOOLMAN product is defective in materials or workmanship during the warranty period, we will either repair or replace the unit.

This warranty does not apply to failure or damage to a myCOOLMAN product caused by incorrect or faulty fitment, accidental or intentional damage, failure of other products, incorrect application, incorrect voltage, environmental damage, operation of the product outside of its environmental and technical specifications, or repair or modification carried out by anyone other than an authorised repairer.

Designed and made in China for

LEISURE-TEC Australia Pty Ltd
50 Metrolink Circuit
Campbellfield, VIC 3061 Australia

www.mycoolman.com.au